


26PIN (M)      26PIN (M)

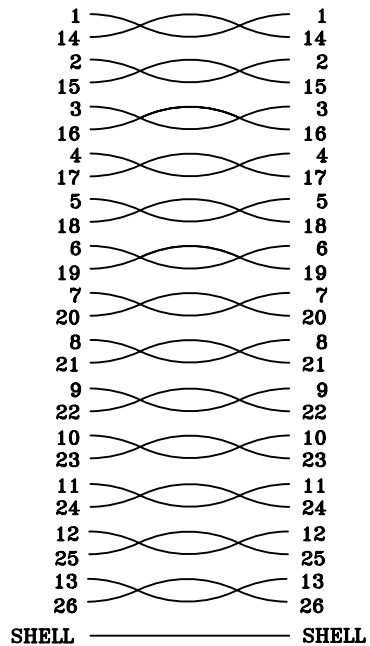

- 100% OPEN / SHORT / INSULATING TEST
- INSULATION TEST: 2MΩ

QTY	COMPONENTS	DESCRIPTION	Q'TY
2	4	26M	Half Pitch Centronic 26P Male Connector Shell: Steel Nickel Plated Insulator: Black P.B.T Contact: Phosphor Bronze 5μ" Gold Plating
2	3	Hood	ABS Hood Color: Beige
4	2	Latch	Stanless Steel Hood: ABS Color: Beige
1	1	Cable	UL2990 (28AWGx13Pair+AEB) Color: Beige L: 300CM
Q'TY	COMPONENTS	DESCRIPTION	Q'TY

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X. ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

HPCX2-262628Q1-M3M-LF

SERIES

LEADFREE

3000mm

MALE TO MALE

Q TYPE COVER

28 AWG

26 TO 26 WAY

煜倫股份有限公司

www.morethanall.com

DESCRIPTION: HALF PITCH CENTRONIC 26P M/M L:3M BEIGE