



36Pin (M)      36Pin (M)

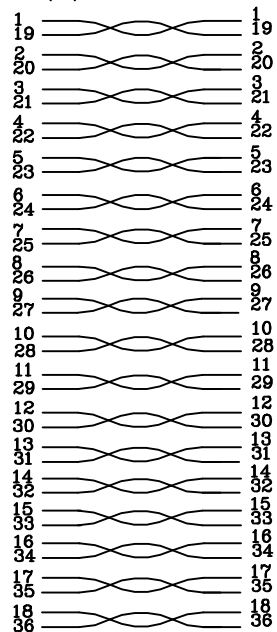

SHELL ————— SHELL

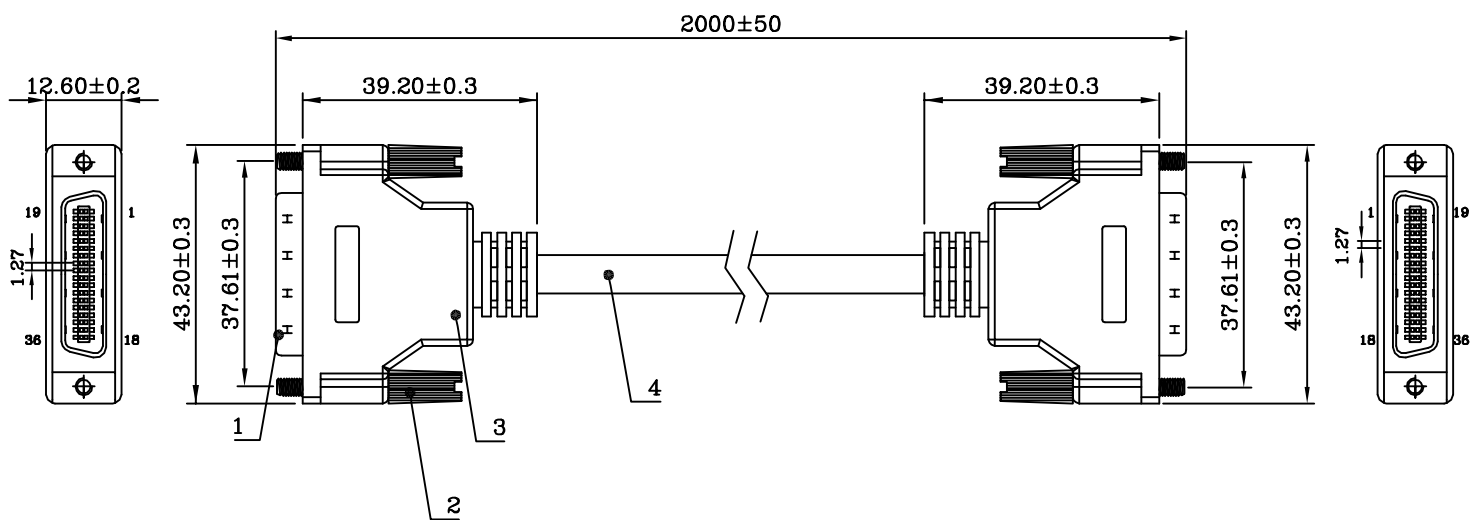

**RoHS**

- 100% OPEN / SHORT / INSULATING TEST
- INSULATION TEST: 2MΩ

COMPONENTS	DESCRIPTION	Q'TY
1	HPC-P-36 Half Pitch Centronic 36P Male Connector Shell: Steel Nickel Plated Insulator: Black P.B.T Contact: Phosphor Bronze 5μ" Gold Plated	2
2	Hood ABS Hood Color: Black	2
3	Jackscrew UNC #4-40 Nickel Plated Hood: ABS Color: Black	4
4	Cable UL2990 28AWG 18Pairs Color: Black	1

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm      SCALE 1 : 1

DATE

SIZE A4

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

PJECTION

照片框

ORDER INFORMATION

HPCX2-363628K1-M2M-LF

SERIES      LEADFREE  
2000mm  
MALE TO MALE  
BLACK COVER  
28 AWG  
36 TO 36 WAY

DESCRIPTION: