


● **MATERIALS: (RoHS Compliant)**

Housing And Cover : Plastic Thermoplastic  
 P.B.T UL94V-0 Black  
 Contacts : Phosphor Bronze Gold  
 Selective Plated  
 Front Shell : Steel Nickel Plated  
 Over Copper

● **ELECTRICAL CHARACTERISTICS:**

Contact Current Rating: 0.5 Amp  
 Dielectric Withstanding Voltage: 500V AC  
 Insulation Resistance: >500MΩ/Min  
 Contact Resistance: 35mΩ/Max  
 Operation Temperature: -55°C ~ +85°C

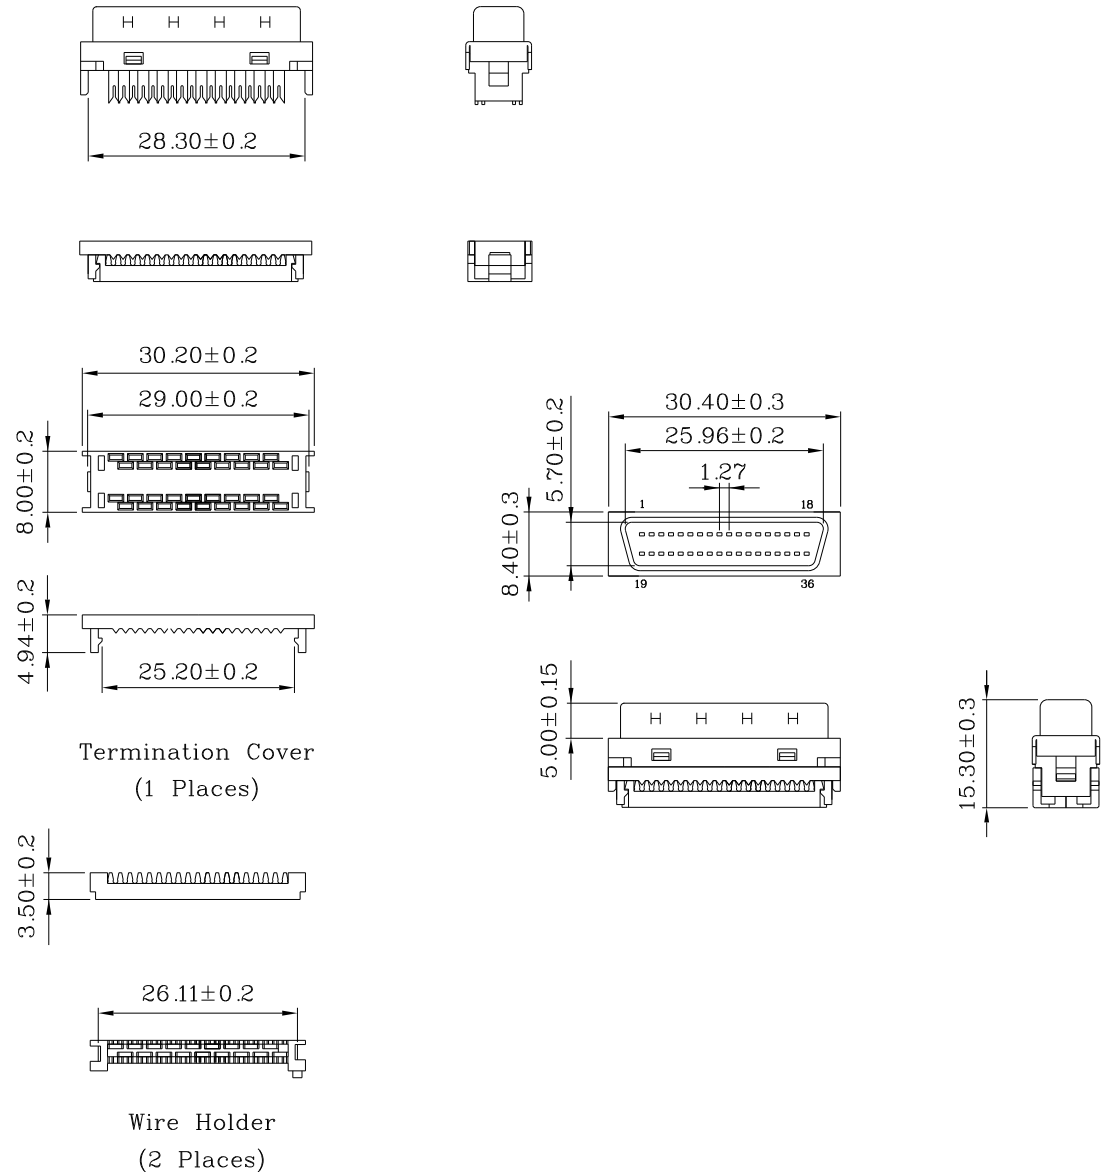

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
 PCB CONNECTORS  
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ±  
 .X ±  
 .XX ±  
 .XXX ±  
 ANG ±

照片框

**ORDER INFORMATION**

HPD-PF-036-LF  
 SERIES | LEADFREE  
 | 36 WAY  
 | IDC  
 | MALE

DESCRIPTION: 1.27mm (.050") Pin Type 36Pos Cable Plug Connector I.D.C Molded Type