

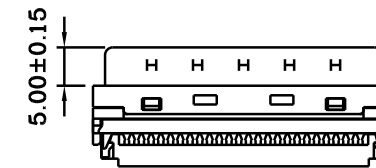
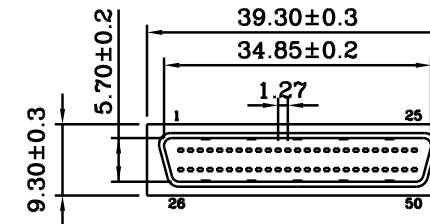

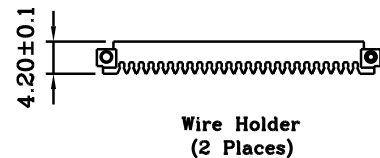
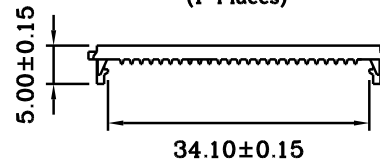
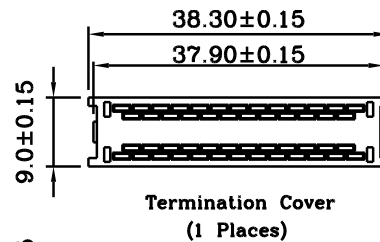



• **MATERIALS:(RoHS Compliant)**

Housing And Cover : Plastic thermoplastic
P.B.T UL94V-0 black
Contacts : Phosphor bronze gold
selective plated
Front Shell : Steel nickel plated
over copper

• **ELECTRICAL CHARACTERISTICS**

Contact Current Rating: 1 Amp
Dielectric Withstanding Voltage: 500V AC
Insulation Resistance: 500MΩ/Min
Contact Resistance: 35mΩ/Max
Operation Temperature : -55°C ~ +105°C



RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY
CHECKED BY GENIUS
UNIT / mm SCALE 1 : 1
DATE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

SIZE A4

PPOJECTION

照片框

ORDER INFORMATION

HPD-PF-050-LF
SERIES | LEADFREE
50 WAY
IDC
MALE

DESCRIPTION: 1.27mm (.050") Pin Type 50Pos Cable Plug Connector I.D.C Assembly Type