


69.05±0.15



• **MATERIALS:(RoHS Compliant)**

Housing And Cover : Plastic thermoplastic

P.B.T UL94V-0 black

Contacts : Phosphor bronze gold selective plated

Front Shell : Steel nickel plated over copper

• **ELECTRICAL CHARACTERISTICS**



Contact Current Rating: 1 Amp

Dielectric Withstanding Voltage: 500V AC/Min


Insulation Resistance: 500MΩ/Min

Contact Resistance: 35mΩ/Max


Operation Temperature: -55°C ~ +105°C

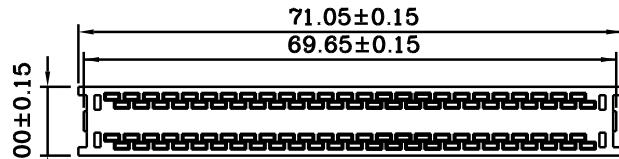

Termination Cover
(1 Places)




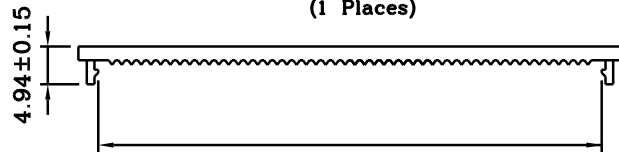


65.85±0.15



Wire Holder
(2 Places)

66.72±0.15

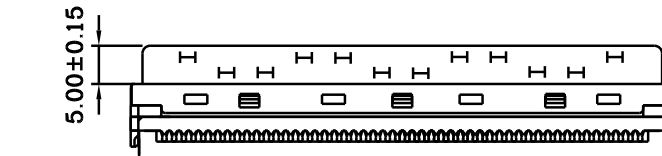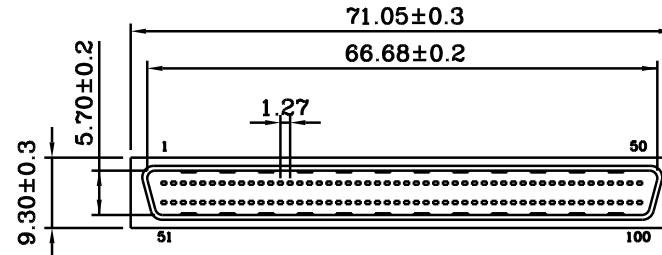

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PJECTION

照片框

ORDER INFORMATION

HPD-PF-100-LF
SERIES | LEADFREE
IDC
MALE
100 WAY

DESCRIPTION: 1.27mm (.050") Pin Type 100Pos Cable Plug Connector I.D.C Assembly Type