




● **MATERIALS: (RoHS Compliant)**

Hood: Plastic Thermoplastic ABS UL 94V-0
 Latch Cover: Plastic Thermoplastic ABS UL 94V-0
 Latch: Stainless Steel
 Inner Shell: Steel Nickel Plated Over Copper

Housing And Cover : Plastic Thermoplastic
 P.B.T UL94V-0 Black
 Contacts : Phosphor Bronze Gold
 Selective Plated
 Front Shell : Steel Nickel Plated
 Over Copper

● **ELECTRICAL CHARACTERISTICS:**

Contact Current Rating: 0.5 Amp
 Dielectric Withstanding Voltage: 500V AC
 Insulation Resistance: >500MΩ/Min
 Contact Resistance: 35mΩ/Max
 Operation Temperature: -55°C ~ +85°C

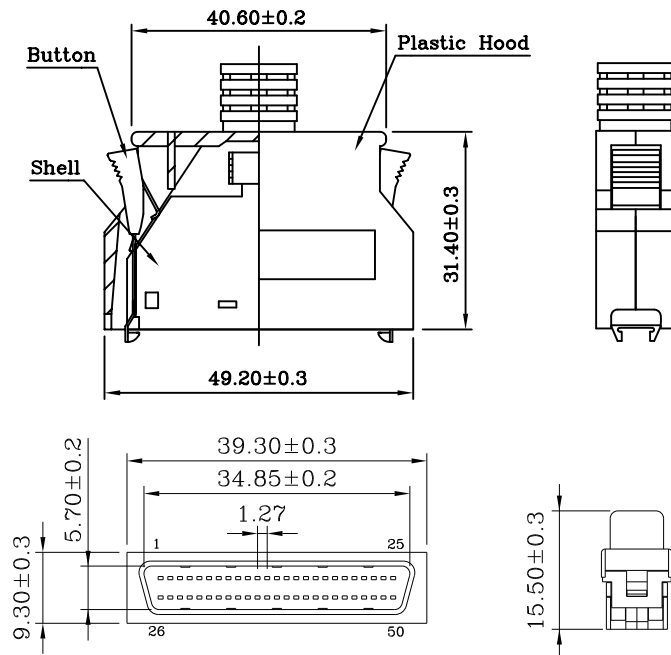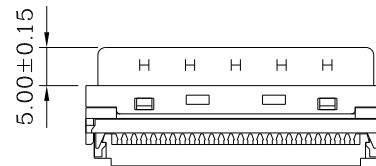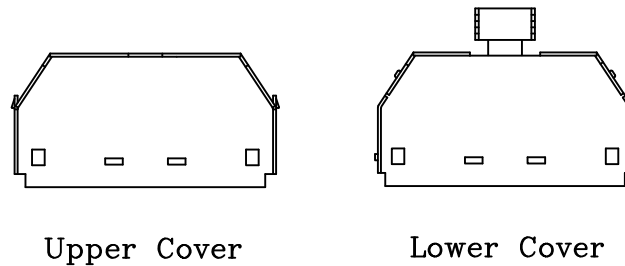

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY
 CHECKED BY GENIUS
 UNIT / mm SCALE 1:1
 DATE

X.±
 .X±
 .XX±
 .XXX±
 ANG ±

照片框

ORDER INFORMATION

HPD-PFQ-050-LF
 SERIES
 LEADFREE
 50WAY
 Q TYPE COVER
 IDC
 MALE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES
 煜倫股份有限公司

www.morethanall.com

SIZE A4 PPOJECTION

DESCRIPTION: 1.27mm(.050") Series 50Pos Plastic Hood With Spring Latches