




● **MATERIALS: (RoHS Compliant)**

Hood: Plastic Thermoplastic ABS UL 94V-0
 Latch Cover: Plastic Thermoplastic ABS UL 94V-0
 Latch: Stainless Steel
 Inner Shell: Steel Nickel Plated Over Copper

Housing And Cover : Plastic Thermoplastic
 P.B.T UL94V-0 Black
 Contacts : Phosphor Bronze Gold
 Selective Plated
 Front Shell : Steel Nickel Plated
 Over Copper

● **ELECTRICAL CHARACTERISTICS:**

Contact Current Rating: 0.5 Amp
 Dielectric Withstanding Voltage: 500V AC
 Insulation Resistance: >500M Ω /Min
 Contact Resistance: 35m Ω /Max
 Operation Temperature: -55°C ~ +85°C

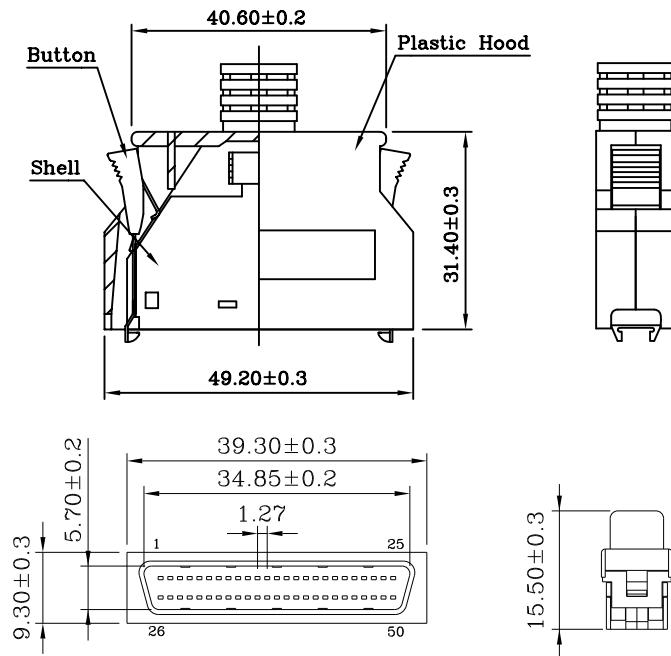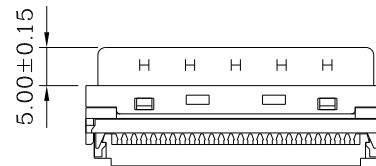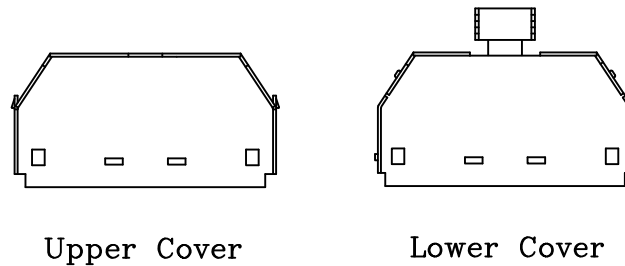

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

TOLERANCES ARE

X. $\pm$
 .X $\pm$
 .XX $\pm$
 .XXX $\pm$
 ANG $\pm$

PPOJECTION

照片框

ORDER INFORMATION

HPD-PFQBK-050-LF
 SERIES | | | | |
 LEADFREE
 50WAY
 BLACK
 Q TYPE COVER
 IDC
 MALE

DESCRIPTION: 1.27mm(.050") Series 50Pos Plastic Hood With Spring Latches