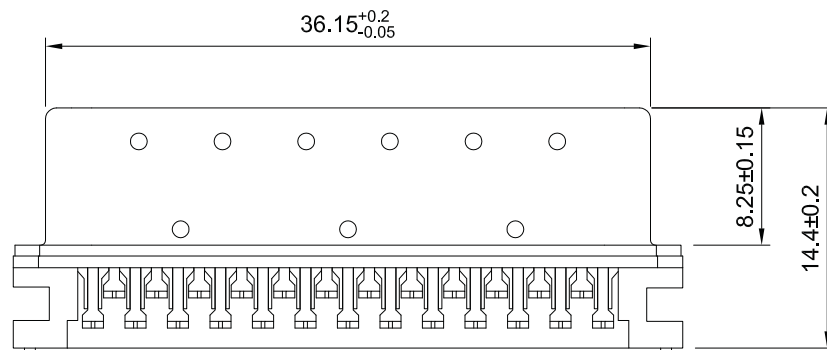
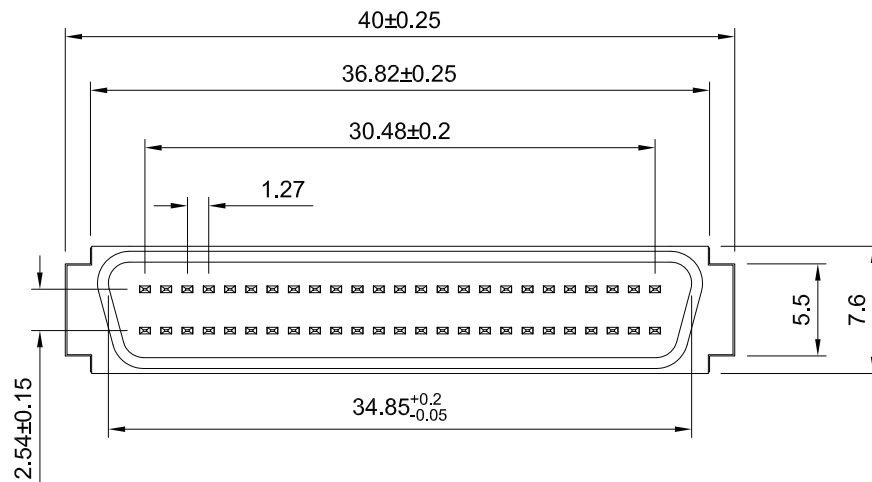


ELECTRICAL CHARACTERISTICS

CONTACT CURRENT RATING: 1 AMPERE

DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC

INSULATION RESISTANCE: 1000 MEGOHMS MIN.

CONTACT RESISTANCE: 25 MILLIOHMS MAX.

MATERIALS

CONTACTS: COPPER ALLOY

INSULATOR: THERMO PLASTIC 94V-0

SHELL: COLD ROLLER STEEL

FINISHES

CONTACT: 5 μ " MIN. GOLD ON MATING END;

ALL UNDERPLATED NICKEL

SHELL: NICKEL OVER COPPER

ENVIRONMENT


OPERATION TEMPERATURE: -55°C TO + 85°C

COMPATIBLE CABLE: AWG #28

NOTES

1. MATERIAL: THERMOPLASTIC

2. THE STRAIN RELIEF WILL NOT BE SOLD SEPARATELY

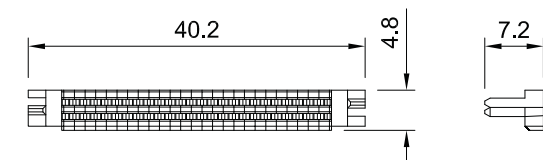

SCALE: 1:1

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

PROJECTION

X. ± 0.30
X. ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG $\pm 1^\circ$

照片框

ORDER INFORMATION

HPD-PI28-050-LF
SERIES
LEADFREE
50 WAY
28~30 AWG
IDC
MALE

DESCRIPTION: 1.27mm Cable Plug