

• **MATERIALS:(RoHS Compliant)**

Housing And Cover : Plastic thermoplastic
P.B.T UL94V-0 black

Contacts : Phosphor bronze gold
selective plated

Front Shell : Steel nickel plated
over copper

• **ELECTRICAL CHARACTERISTICS**

Conact Current Rating: 1 Amp

Dielectric Withstanding Voltage: 500V AC

Insulation Resistance: 500MΩ/Min




Contact Resistance: 35mΩ/Max

Operation Temperature: -55°C ~ +105°C

HPD-PM-050-LF

LEADFREE

RoHS Compliant

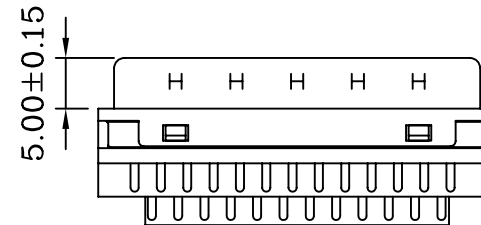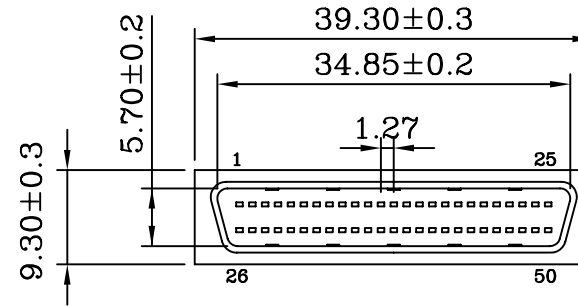

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. HPD-PM-050

DWG NO. HPD-PM-050

FILE NO.

CHECKED BY CY

DRAWING BY

TOLERANCES ARE

.X ± 0.2

.XX ±

.XXX ±

AWG

DESCRIPTION:

**1.27mm (.050") Pin Type 50Pos
Cable Plug Connector
Solder Molded Type**

AREA

REVISIONS

HK

DATE

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

