


- Half pitch 1.27mm(.050") series
- D-SUB type female connector for P.C.B straight Dip solder type
- receptacle assemblies
bracket with latch block and
without latch block
- Die-Cast body provide EMI/RFI shielded

- **Housing:** Plastic thermoplastic
P.B.T UL94V-0 black
- **Contact:** Phosphor bronze gold selective
plated over Tin
- **Bracketshell:** Die-Cast Zinc Nickel plated
over copper

- **Current Rating:** 1 Amp
- **Insulation Resistance:** 500MΩ/Min
- **Withstanding Voltage:** 500V AC/Min
- **Contact Resistance:** 35mΩ Max
- **Temperature Range:** -55°C ~ +105°C

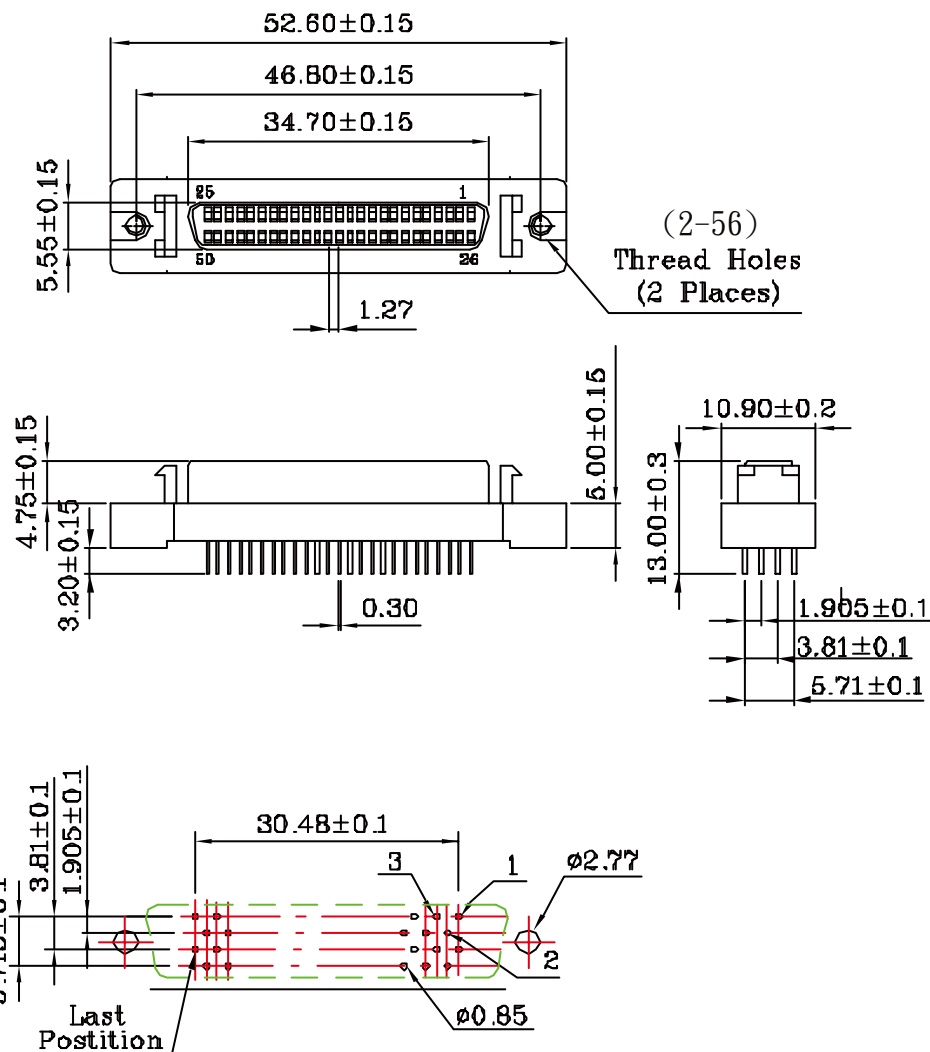

P.C.Board Hole Pattern

TOLERANCES ARE

煜倫股份有限公司

DRAWING BY CY


CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE _____

SIZE A4

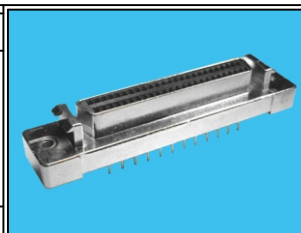PPOJECTION 

ORDER INFORMATION

HPD-SDL-050-LF
SERIES LOCK 50 WAY
DIP 180°
FEMALE

DESCRIPTION: 1.27mm(.050") Pitch D-SUB 50P Female
Connector Straight Dip Solder Type