

SPECIFICATIONS

Housing: Thermoplastic, UL94V-0 (PBT)

Color: Black

Contact: Copper Alloy

Shell: Zinc Alloy



Voltage Current Rating: 1.0Amp, 250V AC

Insulation Resistance: 500MΩ Min.






Contact Resistance: 35mΩ Max.

Dielectric Withstanding Voltage: 500V AC

Temperature Range: -40°C to +105°C

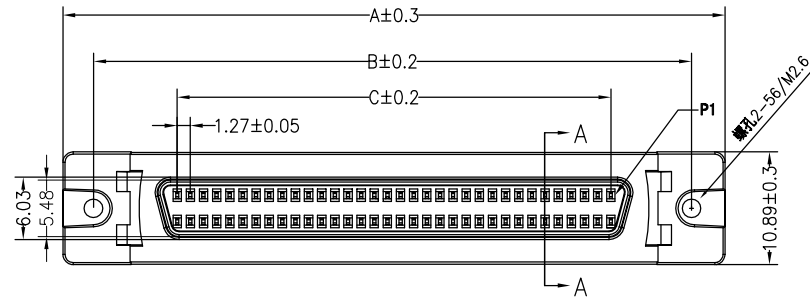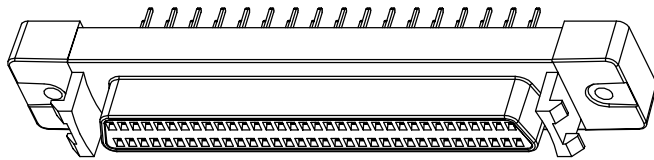

No. of Pin	DIMENSIONS				
	A	B	C	D	E
50	52.55	46.37	30.48	39.57	34.35
68	64.00	57.77	41.91	51.00	45.78
100	84.20	77.70	62.23	71.20	66.10

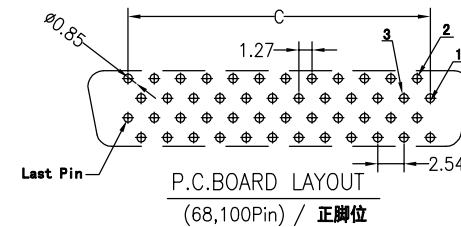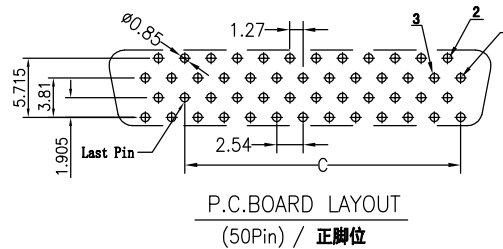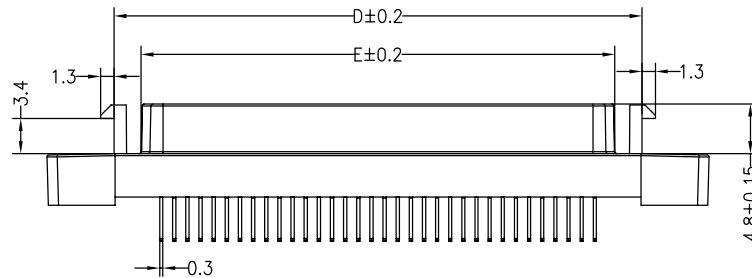

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

TOLERANCES ARE

X. ± 0.38

.X ± 0.35

.XX ± 0.25

.XXX ± 0.15

ANG ±

照片框

ORDER INFORMATION

HPD-SDL-xxx-LF

SERIES

LEADFREE

050.068.100 WAY

LOCK

DIP 180°

FEMALE

DESCRIPTION: SCS1-68P母头180度直插MDR