
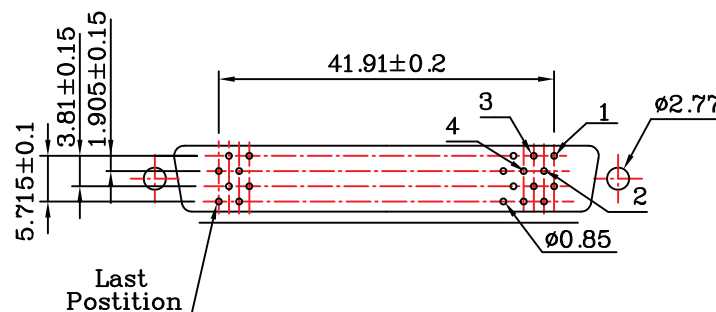

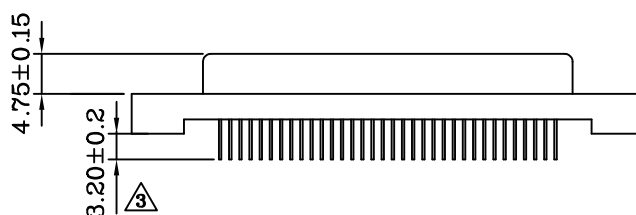
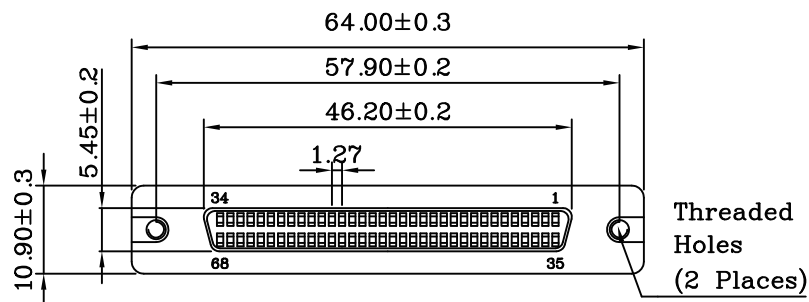


• **MATERIALS:(RoHS Compliant)**


Housing : Plastic thermoplastic
P.B.T UL94V-0 black
Contacts : Phosphor bronze gold
selective plated
Bracket : Die-Cast Zinc nickel
plated over copper

• **ELECTRICAL CHARACTERISTICS**

Contact Current Rating: 1 Amp
Dielectric Withstanding Voltage: 500V AC
Insulation Resistance: 500M Ω /Min
Contact Resistance: 35m Ω /Max
Operation Temperature: -55°C~+105°C

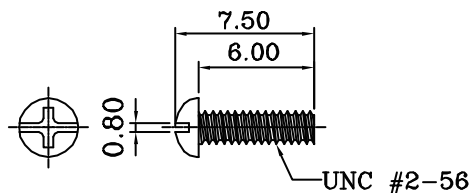

L1:Reverses
PCB LAYOUT

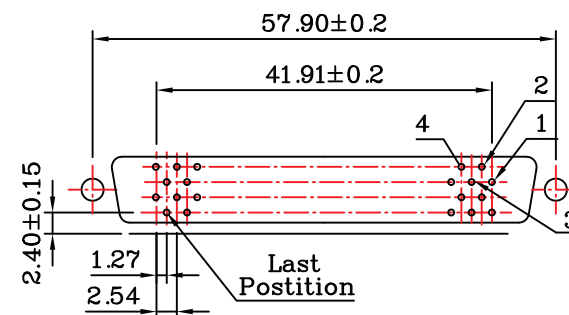

L2:Standard
PCB LAYOUT

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

HPD-SDXLxM-068-LF
SERIES | | | | LEADFREE
| | | | 68 WAY
| | | | UNC
FEMALE | | | | L1:L1 Reverses
DIP 180° | | | | L2:L2 Standard
| | | | NON LOCK

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X.±
.X±
.XX±
.XXX±
ANG±

DESCRIPTION: 1.27mm (.050") Pin Type 68Pos Receptacles Headers Vertical Mount Type