

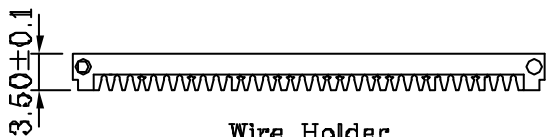


Termination Cover  
(1 Places)

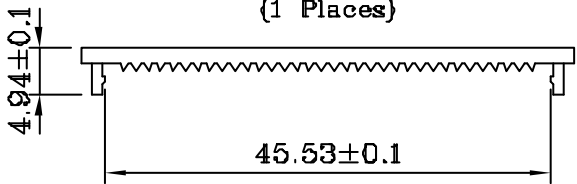

Wire Holder  
(2 Places)

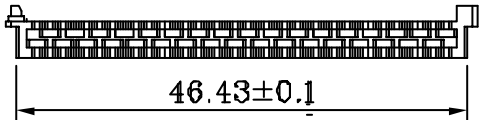

**FEATURES:**


- Half pitch 1.27mm(.050") series
- D-SUB female connector I.D.C type for cable
- Assembly hood with Die-Cast metal hood
- Fully EMI/RFI shielded

**MATERIALS:**



- Housing And Cover: Plastic thermoplastic P.E.T UL94V-0 black
- Contacts: Phosphor bronze gold selective plated
- Shell: Steel nickel plated over copper

**ELECTRICAL:**

- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: -55°C ~ +105°C

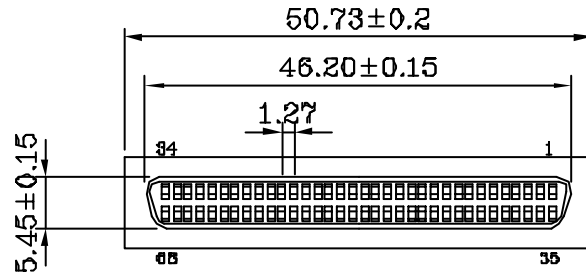

HPD-SF-068-LF  
LEADFREE  
RoHS Compliant

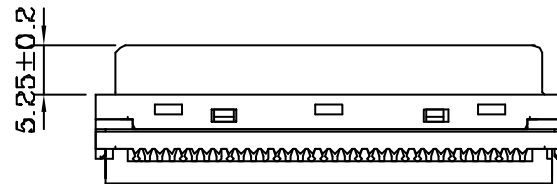

**MORETHANALL**  
CONNECTORS  
ASSEMBLIES

PART NO. HPD-SF-068

DWG NO. HPD-SF-068

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

.X ± 0.2  
.XX ±  
.XXX ±  
AWG

DESCRIPTION:

AREA

REVISIONS

HK

DATE

焜倫股份有限公司