


• **MATERIALS:(RoHS Compliant)**

Housing And Cover : Plastic thermoplastic
 P.B.T UL94V-0 black
 Contacts : Phosphor bronze gold selective plated
 Bracket : Die-Cast Zinc NICKEL plates over copper

• **ELECTRICAL CHARACTERISTICS**

Contact Current Rating: 1 Amp
 Dielectric Withstanding Voltage: 500V AC
 Insulation Resistance: 500MΩ/Min
 Contact Resistance: 35mΩ Max
 Operation Temperature: -55°C ~ +105°C

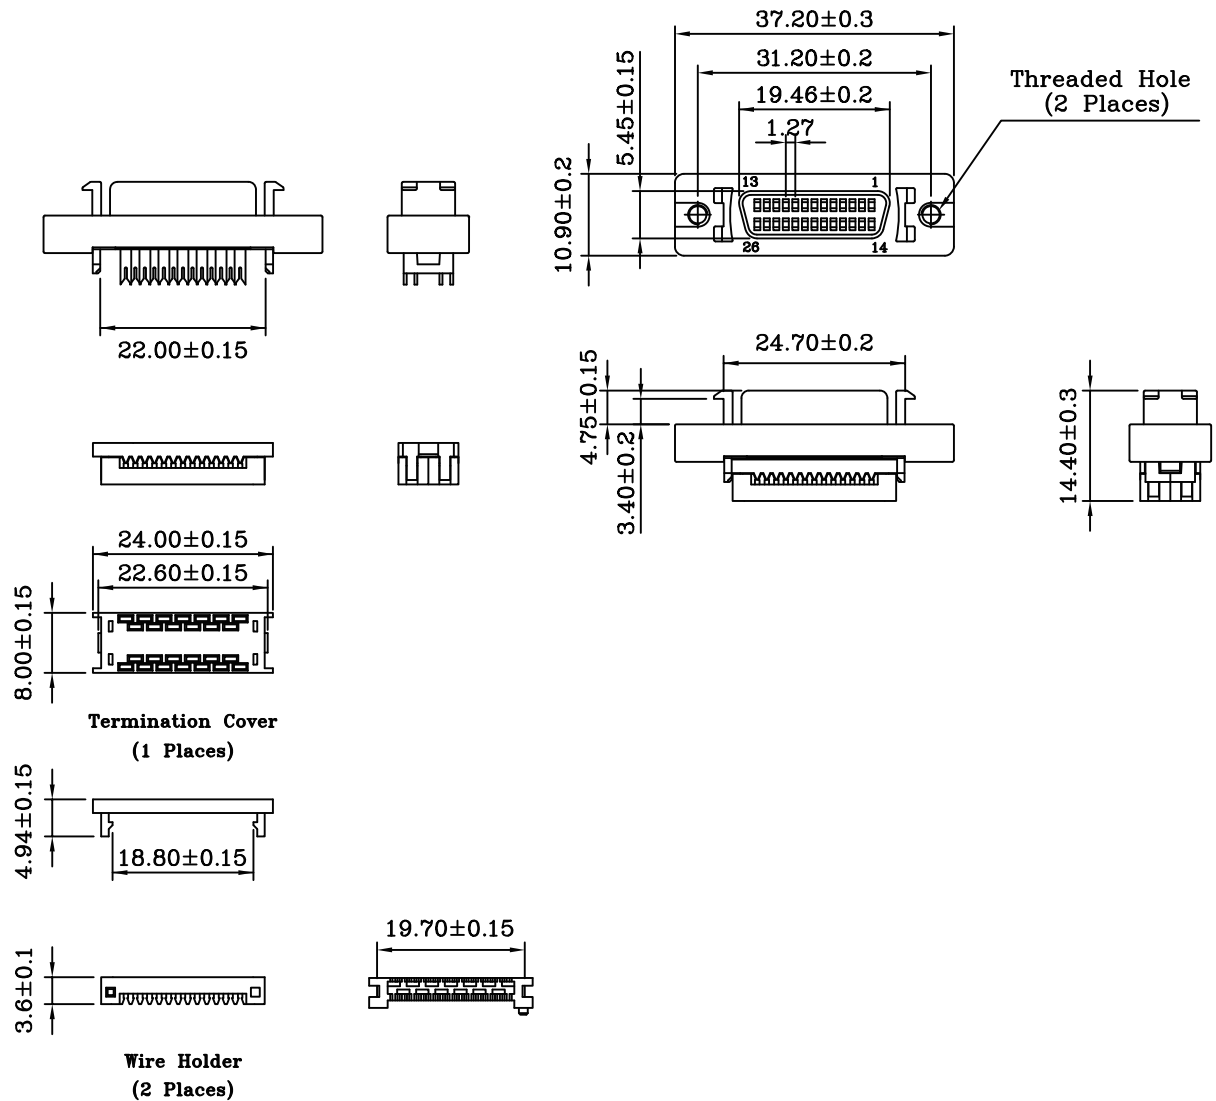

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

DRAWING BY CY

CHECKED BY GENIUS


UNIT/mm SCALE 1:1

DATE

SIZE A4

X. ±
 .X ± 0.20
 .XX ± 0.10
 .XXX ±
 ANG ±

PPOJECTION



ORDER INFORMATION

HPD-SFL-026-LF
 SERIES | LEADFREE
 | 26 WAY
 | LOCK
 | IDC
 | FEMALE

DESCRIPTION: 1.27mm (.050") Pin Type 26Pos
 Cable Receptacles Connector I.D.C Type

煜倫股份有限公司

www.morethanall.com