

• **MATERIALS:(RoHS Compliant)**

Housing And Cover : Plastic thermoplastic
P.B.T UL94V-0 black

Contacts : Phosphor bronze gold
selective plated

Bracket : Die-Cast Zinc NICKEL
plates over copper

• **ELECTRICAL CHARACTERISTICS**



Contact Current Rating: 1 Amp

Dielectric Withstanding Voltage: 500V AC


Insulation Resistance: 500MΩ/Min

Contact Resistance: 35mΩ Max




Operation Temperature: -55°C ~ +105°C

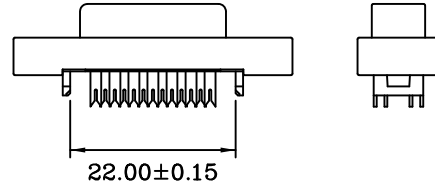

Termination Cover
(1 Places)



Wire Holder
(2 Places)

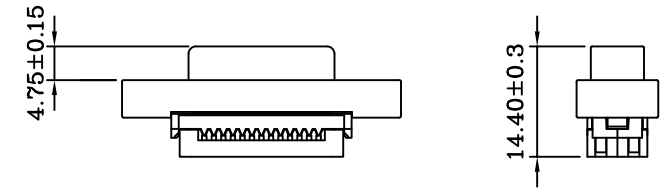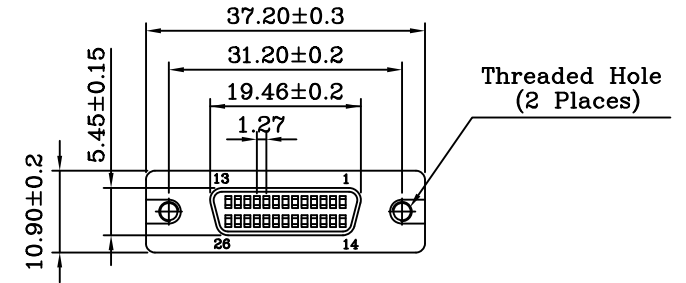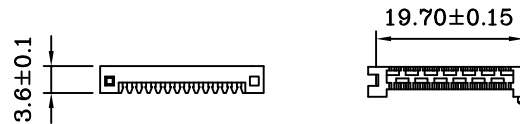

HPD-SFX-026-LF
LEADFREE

RoHS Compliant

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. HPD-SFX-026

DWG NO. HPD-SFX-026

CHECKED BY CY

TOLERANCES ARE

DESCRIP TION:

1.27mm (.050") Pin Type 26Pos
Cable Receptacles Connector
I.D.C Type

煜倫股份有限公司

FILE NO.

DRAWING BY

.X ± 0.2
.XX ± 0.1
.XXX ±
AWG

AREA

REVISIONS

HK

DATE

UNIT / mm

SCALE 1:1

PROJECTION

