

**FEATURES:**










- Half pitch 1.27mm(.050") series
- D-SUB type female connector
- For 1.27mm(.050") ribbon cable
- Panel mount receptacle assemblies bracket with latch block and without latch block

**MATERIALS:**

- Housing And Cover: Plastic thermoplastic P.B.T UL94V-0 black
- Contact: Phosphor bronze gold selective plated
- Bracketshell: Die-Cast zinc nickel plated over copper

**ELECTRICAL:**

- Current Rating: 1 Amp
- Insulation Resistance: 500MΩ/Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35mΩ Max
- Temperature Range: -55°C ~ +105°C

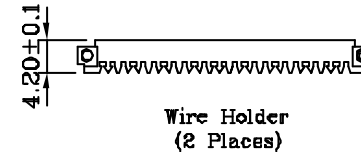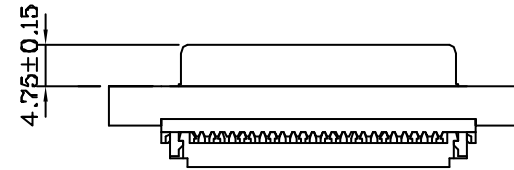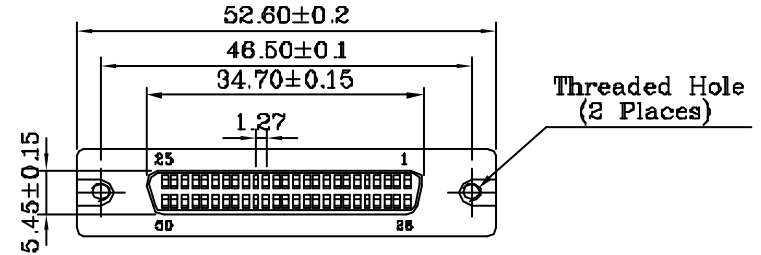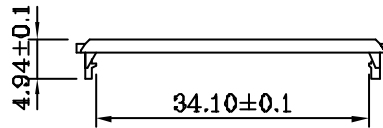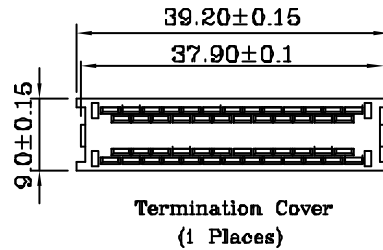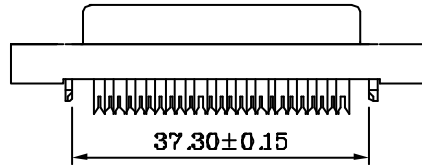

**MORETHANALL**  
CONNECTORS  
ASSEMBLIES

PART NO. **HPD-SFX-050**

DWG NO. **HPD-SFX-050**

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X±0.2  
.XX±  
.XXX±  
AWG

DESCRIPTION:

Half Pitch D-SUB 50P Female  
Connector I.D.C Type For  
Ribbon Cable

AREA

REVISIONS

HK

DATE

煜倫股份有限公司