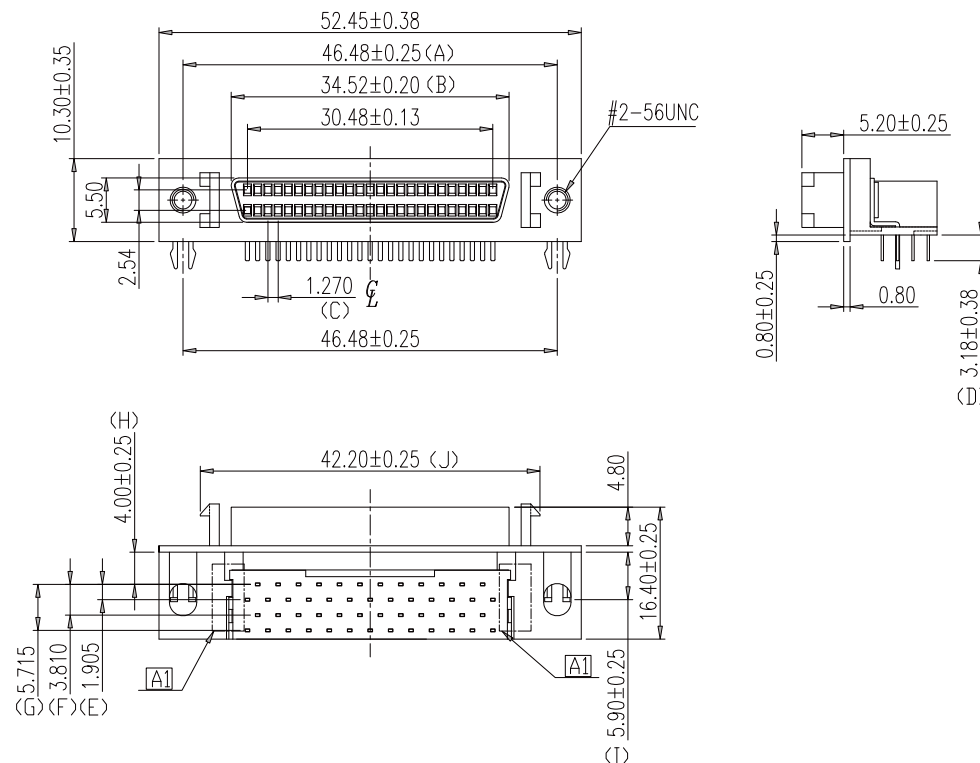


RECOMMENDED P.C.B. LAYOUT

INSPECTION DIMENSION:(A)~(J)

NOTES

- MATERIAL:**
Housing:PBT, UL 94V-0, Color:Black.
Terminal:Copper Alloy.
Shell:Zinc Alloy.
Boardlock:Copper Alloy.
- FINISH:**
Terminal:Gold Plated over Nickel at Contact Area.
Tin Plated over Nickel at Solder Ared.
Shell:Nickel Plated.
Boardlock:Tin Plated.
- This Product is LEAD-FREE & RoHS Compliance Product.

SPECIFICATIONS

- SCSI
- Current Rating: 1 Ampere per Contact
- Contact Resistance: 35 Milliohms Max.
- Insulation Resistance: 1000 Megohms Min.
- Dielectric Withstanding Voltage: 500V DC(RMS)
- Total Mating Force: 17.7 Kgf Max.
- Total Unmating Force: 1.6 Kgf Min.
- Operating Temperature: -55°C to +85°C

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
.X ±
.XX ± 0.25
.XXX ± 0.13
ANG ± 2°

照片框

ORDER INFORMATION

HPD-SRL-050-LF
SERIES | | | LEADFREE
| | | 050 WAY
| | | LOCK
| | | DIP 90°
| | | FEMALE

DESCRIPTION: SCSI II PIN TYPE RIGHT ANGLE