
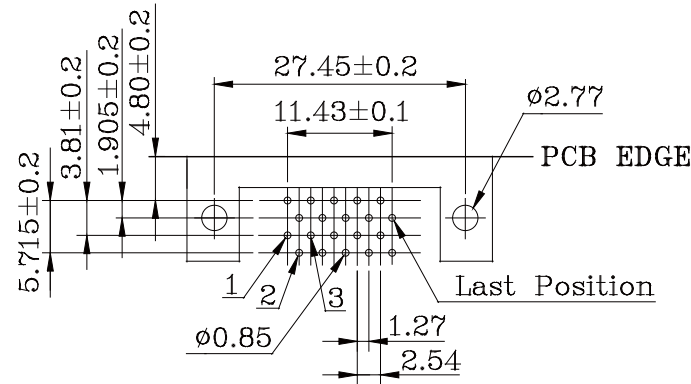
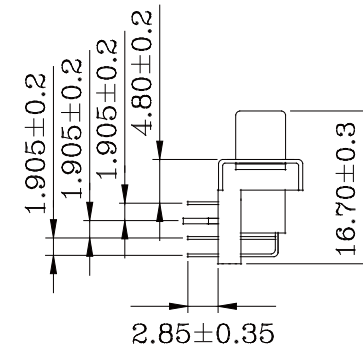
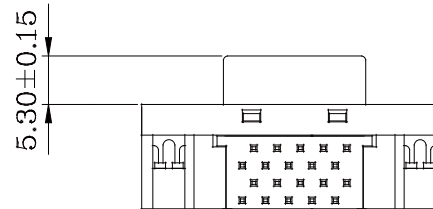


• **MATERIALS:(RoHS Compliant)**

Housing And Cover: Plastic Thermoplastic  
P.B.T UL94V-0 Black  
Contacts: Phosphor Bronze Gold  
Selective Plated  
Front Shell: Steel Nickel Plated  
Over Copper  
Bracket: Steel Nickel Plated  
Over Copper  
Boardlock: Brass Tin Plated  
Over Copper

• **ELECTRICAL CHARACTERISTICS:**

Contact Current Rating: 1 Amp  
Dielectric Withstanding Voltage: 500V AC  
Insulation Resistance: >500MΩ/Min  
Contact Resistance: 35mΩ/Max  
Operation Temperature: -55°C ~ +105°C

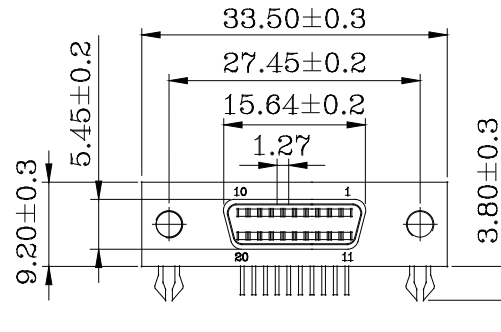

PCB Layout



煜倫股份有限公司

www.morethanall.com

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY  
CHECKED BY GENIUS  
UNIT / mm SCALE 1 : 1  
DATE

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

SIZE A4 PROJECTION

照片框

ORDER INFORMATION

HPD-SRX-020-LF  
SERIES | LEADFREE  
| 20 WAY  
| NON LOCK  
| DIP 90°  
FEMALE

DESCRIPTION: 1.27mm (.050") Pin Type 20Pos Receptacles Headers Right-Angle Mount Type