

**FEATURES:**



- Half pitch 1.27mm(.050") series
- D-SUB type right angle dip mount connector
- Bracket with latch block and without latch block
- Steel body provide EMI/RFI shielded

**MATERIALS:**

- Housing and cover: Plastic thermoplastic P.B.T UL94V-0 black
- Contact: Phosphor bronze gold selective plated
- Shell: Steel, nickel plated over copper
- Bracket: Steel, nickel plated over copper
- Boardlock: Brass tin plated copper

**ELECTRICAL:**

- Current Rating: 1 Amp
- Insulation Resistance: 500M $\Omega$ /Min
- Withstanding Voltage: 500V AC/Min
- Contact Resistance: 35m $\Omega$  Max
- Temperature Range: -55°C ~ +105°C

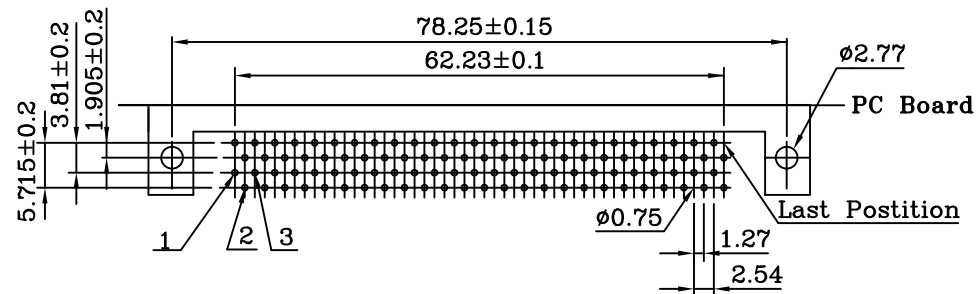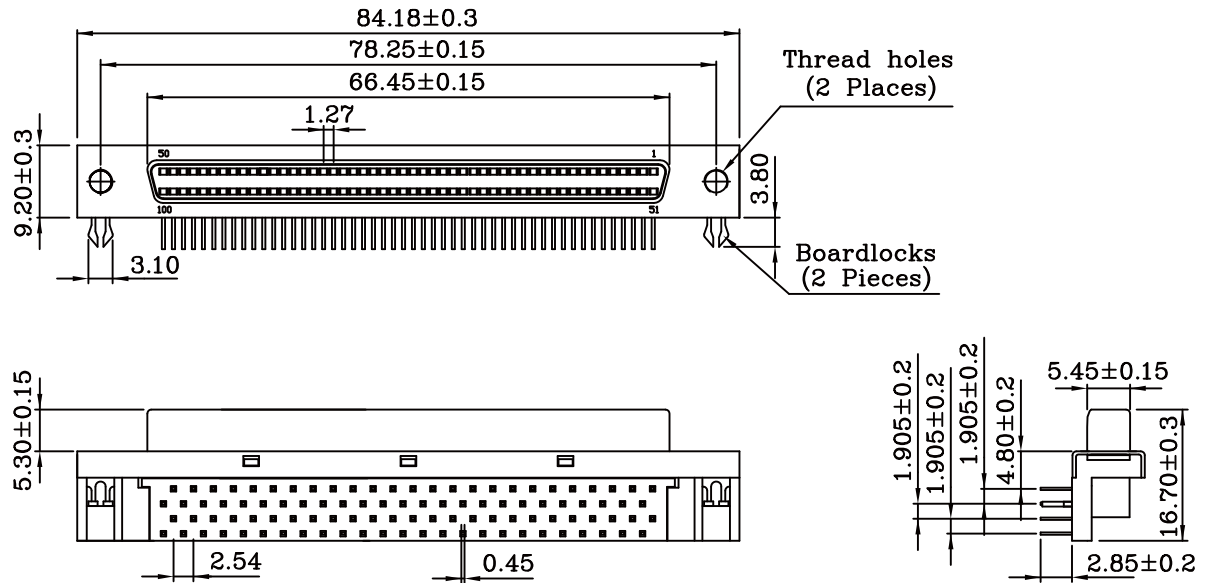

PC Board Mounting Dimensions

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY		X. ± .X ± .XX ± .XXX ± ANG ±
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PPOJECTION	

照片框

ORDER INFORMATION

HPD-SRX-100-LF  
SERIES | LEADFREE  
| 100 WAY  
| NON LOCK  
| DIP 90°  
| FEMALE

DESCRIPTION: 1.27mm(.050") Pitch D-SUB 100P Female Connector Right Angle Dip Mount Type