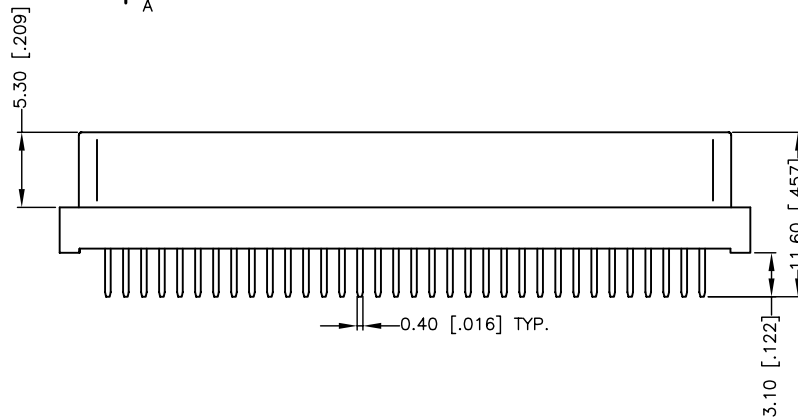
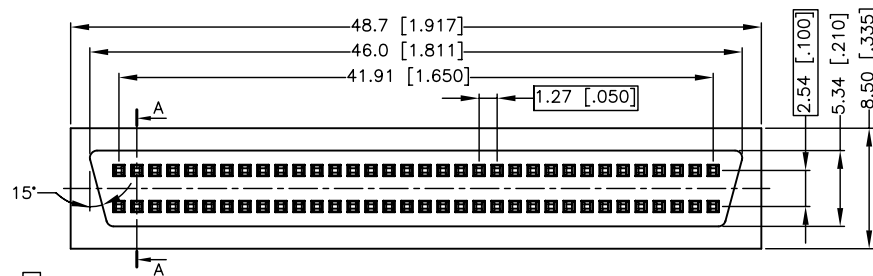


MATERIALS

1. HOUSING : PA9T, (UL 94V-0),BLACK
2. TERMINAL : COPPER ALLOY
GOLD PLATED ON CONTACT AREA
TIN PLATED ON SOLDER TAILS.
UNDER NICKEL PLATED. (t=0.40mm)

SPECIFICATION

1. CURRENT RATING :1 A MAX.
2. DIELECTRIC WITHSTANDING VOLTAGE :
500V AC R.M.S. FOR ONE MINUTE.
3. INSULATION RESISTANCE : 1000M Ω MIN.
AT 500V DC.
4. CONTACT RESISTANCE:
30 m Ω MAX.
5. OPERATING TEMPERATURE : -40°C TO +85°C.

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

HPDP-SDL2-068-LF
SERIES L PIN 2
DIP 180°
FEMALE
LEADFREE
68 WAY

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, $\pm$
.X $\pm$ 0.38
.XX $\pm$ 0.25
.XXX $\pm$ 0.15
ANG $\pm$ 3°

PPOJECTION

DESCRIPTION: SCSI II SOCKET DIP 68PIN 4R RIGHT FEET(ROHS)