

• **MATERIALS:(RoHS Compliant)**




Housing : Plastic thermoplastic
P.B.T UL94V-0 black
Contacts : Phosphor bronze gold
selective plated

• **ELECTRICAL CHARACTERISTICS**


Contact Current Rating: 1 Amp
Dielectric Withstanding Voltage: 500V AC
Insulation Resistance: 500M Ω /Min
Contact Resistance: 35m Ω /Max
Operation Temperature: -55°C ~ +105°C

HPDP-SDLx-068-LF
LEADFREE
L1:STANDARD
L2:REVERES

RoHS Compliant

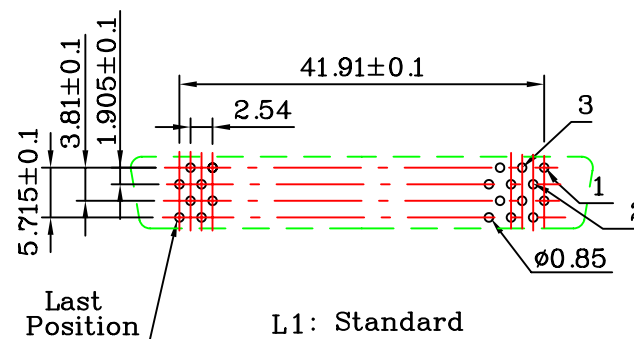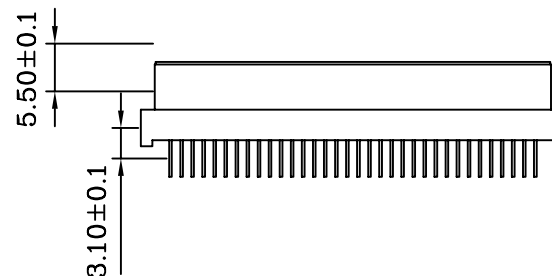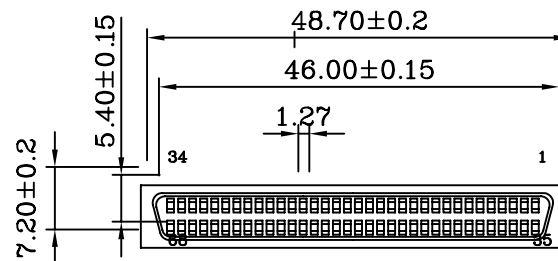

L1: Standard
PCB LAYOUT

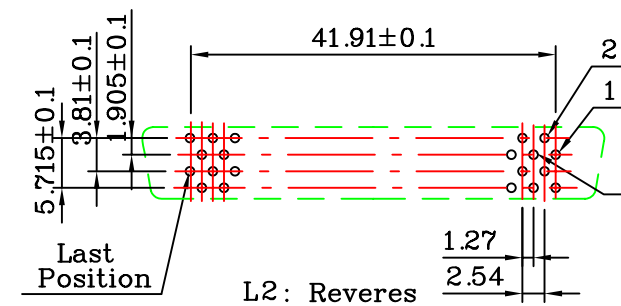

L2: Revers
PCB LAYOUT

MORETHANALL
CONNECTORS
ASSEMBLIES

煜倫股份有限公司

PART NO. HPDP-SDLx-068

DWG NO. HPDP-SDLx-068

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2
.XX ± 0.1
.XXX ±
AWG

DESCRIP TION:

AREA

1.27mm (.050") Pin Type 68Pos
Receptacles Headers Vertical
Mount Type(Unshielded)

REVISIONS

HK

DATE