
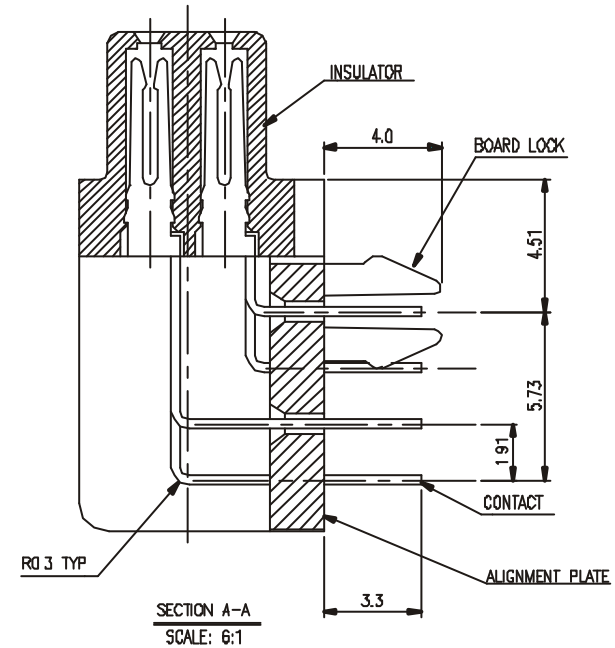
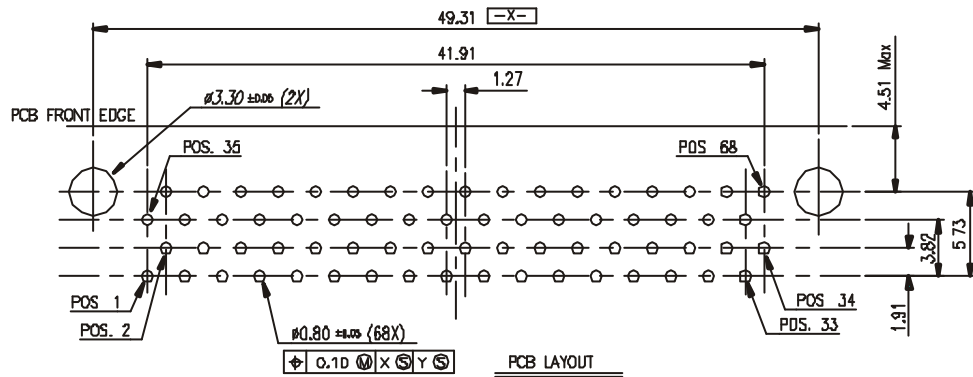


HPDP-SRZ-068-LF
LEADFREE
RoHS Compliant

- NOTE.
- 1.0 CONNECTOR ELECTRICAL CHARACTERISTICS.
 - 1.1 CONTACT CURRENT RATING: 1.0 AMPERE
 - 1.2 DIELECTRIC WITHSTANDING VOLTAGE: AC 500 V r.m.s.
 - 1.3 INSULATION RESISTANCE: 1000 MILLIOHMS Min
 - 1.4 CONTACT RESISTANCE: 35 MILLIOHMS Max.
 - 2.0 MATERIAL.
 - 2.1 CONTACT: COPPER ALLOY
 - 2.2 INSULATOR: THERMOPLASTIC WITH GLASS-FIBER FILLED, UL 94V-0 RATED
 - 2.3 BOARD LOCK: COPPER ALLOY
 - 2.4 ALIGNMENT PLATE: THERMOPLASTIC WITH GLASS-FIBER FILLED, UL 94V-D RATED
 - 3.0 FINISH:
 - 3.1 CONTACT: GOLD PLATING
 - 3.2 BOARD LOCK: TIN OR TIN/LEAD PLATED OVER COPPER.
 - 4.0 ENVIRONMENT:
 - 4.1 OPERATING TEMPERATURE: -55°C TO +105°C
 - 4.2 RECOMMENDED PCB THICKNESS=1.57±0.10mm

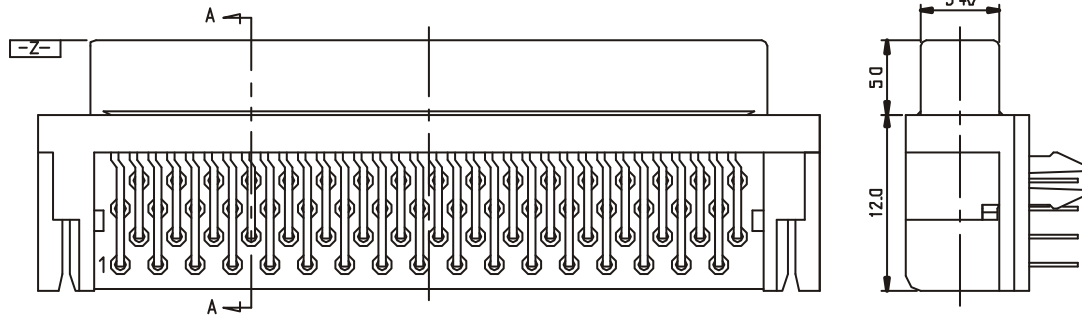

| | | | | | |
|----------|-----------------------|-----------|--|---|---------------|
| | PART NO. HPDP-SRZ-068 | | TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG | DESCRIP TION: HALF-PITCH PIN TYPE CONNECTOR FEMALE,PCB R/A DIP SOLDER,WIT- BOARD LOCK,ALL-PLASTIC,68' PD <CUSTOMER DRAWING> | |
| | DWG NO. HPDP-SRZ-068 | | | | CHECKED BY CY |
| 焯倫股份有限公司 | FILE NO. | | DRAWING BY | AREA | |
| | UNIT / mm | SCALE 1:1 | PROJECTION | | REVISIONS |
| | | | | HK | DATE |