


28AWG

- 100% OPEN / SHORT / INSULATING TEST
- INSULATION TEST: 2MΩ

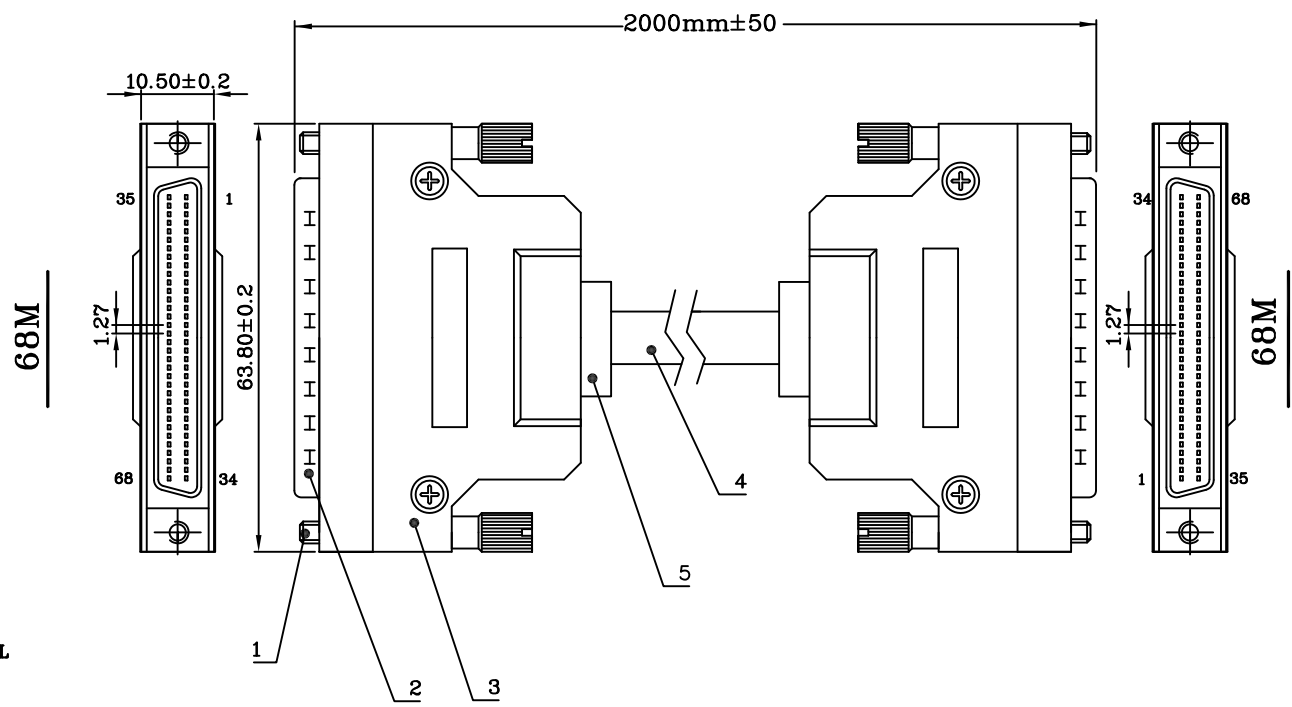

| | COMPONENTS: | DESCRIPTION | Q'TY |
|---|---------------|---|------|
| 1 | Jack screw | UNC #2-56 Metal Nickel Plated | 4 |
| 2 | FMD68M | Half Pitch D-SUB 1.27mm 68P Male Connector Shell: Steel Nickel Plated Insulator: Black P.B.T Contact: Phosphor bronze 5μ" Gold Plated. | 2 |
| 3 | Hood | Zinc Alloy Die-Cast Nickel Plated | 2 |
| 4 | Cable (7484R) | UL20276 30AWG 32Pairs 28AWG 2Pairs I.D: 0.65mm O.D: 9.8mm Impedance: 130Ω ±10Ω Color: Beige L: 2000mm | 1 |
| 5 | SR | PVC Molded Color: Beige | 2 |

HPDX2-6868-M2M-LF
LEADFREE
RoHS Compliant



PART NO. HPDX2-6868 -M2M

DWG NO. HPDX2-6868 -M2M

FILE NO.

UNIT / mm SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE
.X ± 0.2
.XX ± 0.1
.XXX ±
AWG

| | | | | |
|---------------|--------------------------|----|------|--|
| DESCRIP TION: | SCSI Cable L : 200CM(2M) | | | |
| AREA | REVISIONS | HK | DATE | |

煜倫股份有限公司