



1 2 3 4 5 6 7 8 9 0

J
I
H
G
F
E
D
C
B
A




HPD-68P HPD-68P HPD-68P HPD-68P

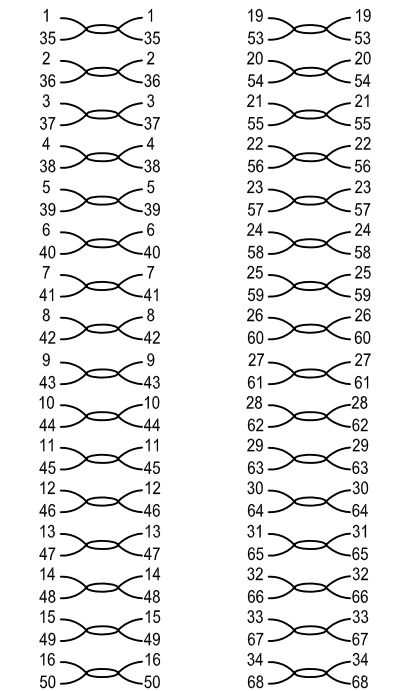

SHELL — SHELL



100% OPEN / SHORT / INSULATING TEST
INSULATION TEST:2MΩ

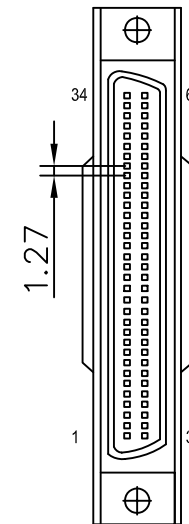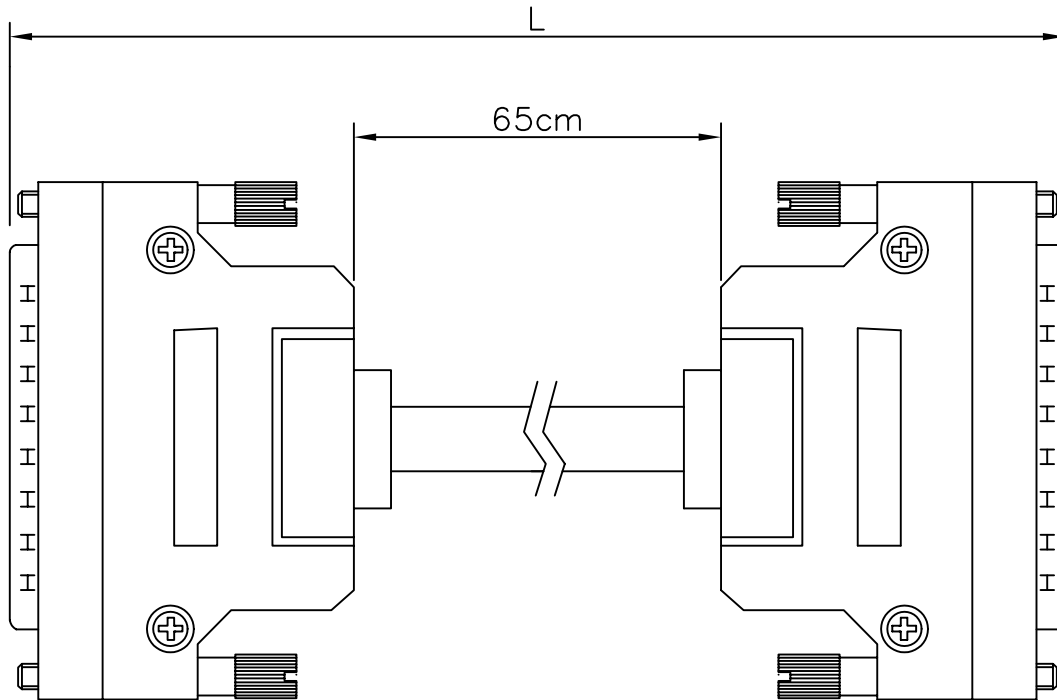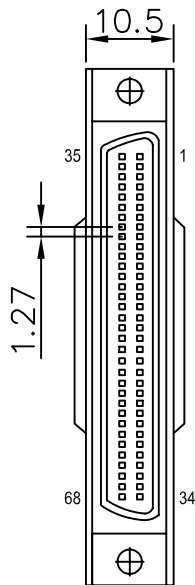

COMPONENTS:	DESCRIPTION	QTY
1 JACKSCREW	UNC #2-56 METAL NICKEL PLATED	4
2 HPD-68P	HALF PITCH D-SUB 1.27mm 68P MALE CONNECTOR SHELL:STEEL NICKEL PLATED INSULATOR:BLACK P.B.T CONTACT:PHOSPHOR BRONZE 5u" GOLD PLATED.	2
3 HOOD	ZINC ALLOY DIE-CAST NICKEL PLATED	2
4 CABLE (7484R)	UL20276 30AWG 32PAIRS 28AWG 2PAIRS I.D:0.65mm O.D:9.8mm IMPEDANCE:130Ω±10Ω COLOR: BEIGE L:XXXcm	1
5 SR	PVC MOLDED COLOR:BEIGE	2

LENGTH UNIT:CM	TOLERANCE
<50	± 2
50-100	± 3
101-150	± 4
151-300	± 5
301-500	± 6
>500	± 10

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. HPDX2-6868-M65C

DWG NO. HPDX2-6868-M65C

FILE NO.


UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.2
.XX ±
.XXX ±
AWG

DESCRIPTION: SCSI 3 CABLE L:XXXCM

AREA

REVISIONS

HK

DATE

焯倫有限公司