


68M

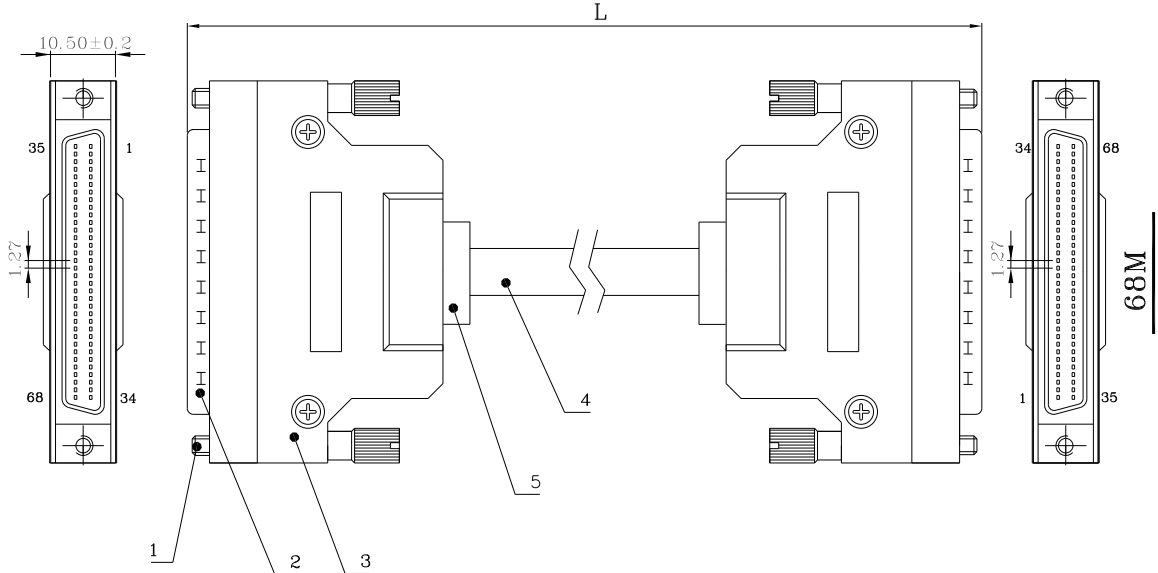

Length Unit:CM	Tolerance
< 50	± 2
50-100	± 3
101-150	± 4
151-300	± 5
301-500	± 6
> 500	± 10

- 100% OPEN / SHORT / INSULATING TEST
- INSULATION TEST: 2MΩ

COMPONENTS:	DESCRIPTION	Q'TY
1 Jackscrew	UNC #2-56 Metal Nickel Plated	4
2 FMD68M	Half Pitch D-SUB 1.27mm 68P Male Connector Shell: Steel Nickel Plated Insulator: Black P.B.T Contact: Phosphor bronze 5μ " Gold Plated.	2
3 Hood	Zinc Alloy Die-Cast Nickel Plated	2
4 Cable (7484R)	UL20276 30AWG 32Pairs 28AWG 2Pairs I.D: 0.65mm O.D: 9.8mm Impedance: 130Ω ±10Ω Color: Beige L: XXXcm	1
5 SR	PVC Molded Color: Beige	2

HPDX2-6868-MxxxC-LF
LEADFREE
RoHS Compliant

	PART NO. HPDX2-6868-MxxxC		TOLERANCES ARE .X ± 0.2 .XX ± .XXX ± AWG	DESCRIP TION:				
	DWG NO. HPDX2-6868-MxxxC							CHECKED BY CY
焯倫股份有限公司	FILE NO.		DRAWING BY		AREA	REVISIONS	HK	DATE
	UNIT / mm	SCALE 1:1	PROJECTION					