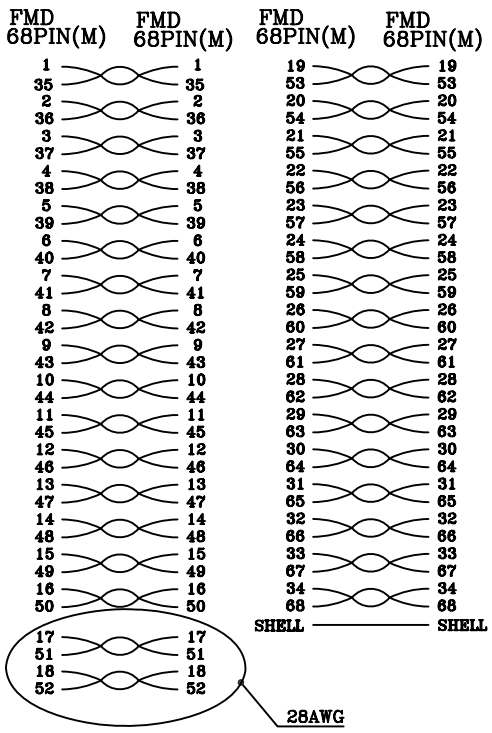

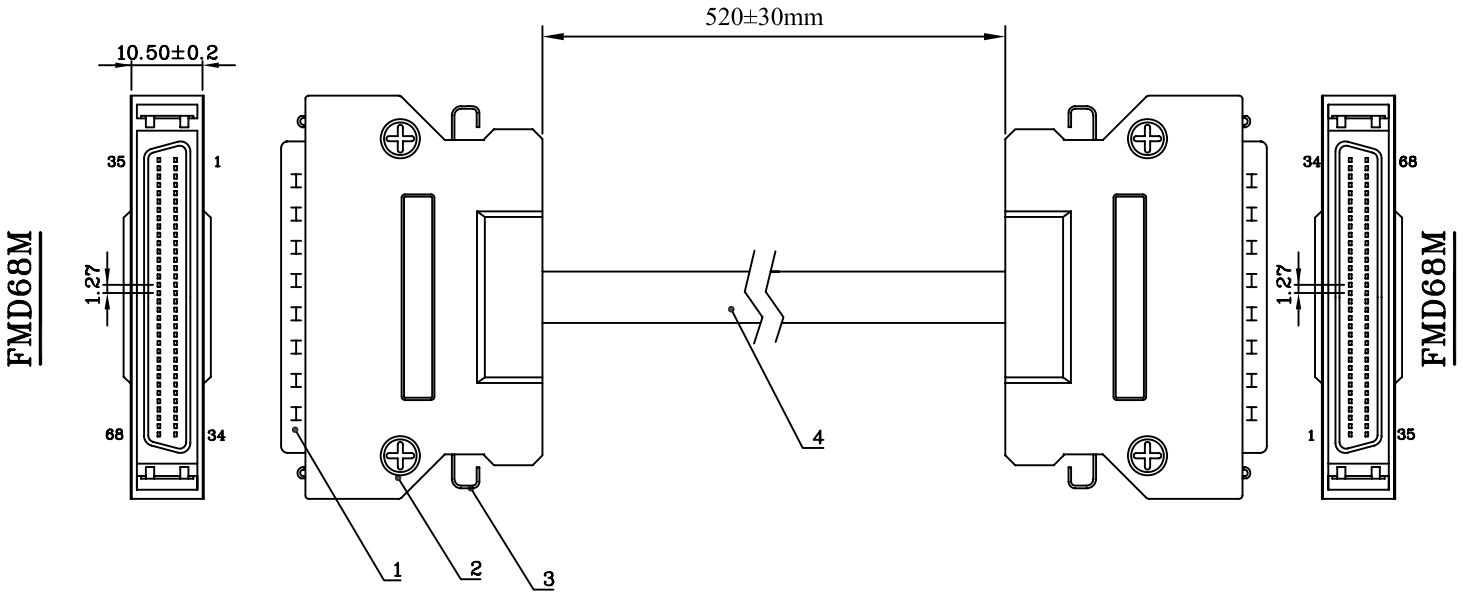

HPDX2-6868R1-M52C-LF

LEADFREE

RoHS Compliant

- 100% OPEN / SHORT / INSULATING TEST
- INSULATION TEST: 2MΩ

	COMPONENTS:	DESCRIPTION	Q'TY
1	FMD68M	Half Pitch D-SUB 1.27mm 68P Male Connector Shell: Steel Nickel Plated Insulator: Black P.B.T Contact: Phosphor bronze# 5 " Gold Plated.	2
2	Hood	Zinc Alloy Die-Cast Nickel Plated	2
3	SUL/SF	Spring Latches Phosphor Bronze Nickel Plated	4
4	Cable (7484R)	UL20276 30AWG 32Pairs 28AWG 2Pairs I.D: 0.65mm O.D: 9.8mm Impedance: 130Ω ±10 Color: Black L: 620mm	1

MORETHANALL CONNECTORS ASSEMBLIES

煜倫股份有限公司

PART NO. HPDX2-6868R1-M52C			
DWG NO. HPDX2-6868R1-M52C	CHECKED BY CY	TOLERANCES ARE .X ± 0.1 .XX ± 0.01 .XXX ± AWG	DESCRIP TION: 68P SCSI M/M L:520mm BLACK
FILE NO.	DRAWING BY		
UNIT / mm	SCALE 1 : 1	PROJECTION	AREA / REVISIONS / HK / DATE