
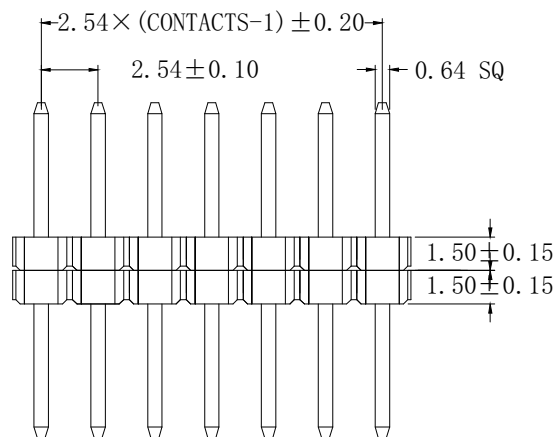
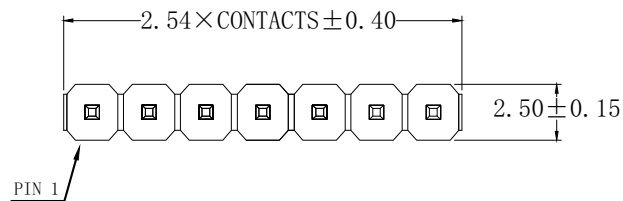


P. C. B . LAYOUT

A: 15.00 mm

B: 6.00 mm

C: 6.00 mm

D: 3.00 mm

MATERIAL

HOUSING : NY6T, UL94V-0

CONTACT : COPPER ALLOYS

PLATED : GOLD FLASH

COLOR : BLACK

SPECIFICATION

CURRENT : 3A

OPERATING TEMPERATURE : -55° C TO +105° C

CONTACT RESISTANCE : 20 MILLIOHMS MAX

INSULATION RESISTANCE: 1000 MEGAOHMS MIN

WITHSTANDING VOLTAGE : 1000 V AC/minute

CONTACTS			
	1×11	1×21	1×31
1×02	1×12	1×22	1×32
1×03	1×13	1×23	1×33
1×04	1×14	1×24	1×34
1×05	1×15	1×25	1×35
1×06	1×16	1×26	1×36
1×07	1×17	1×27	1×37
1×08	1×18	1×28	1×38
1×09	1×19	1×29	1×39
1×10	1×20	1×30	1×40

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.38
.XX ± 0.25
.XXX ±
ANG ± 5°

PPOJECTION

照片框

ORDER INFORMATION

HS-D150060060N6T-1Xxx-LF
SERIES
DIP180°
NY6T
DIP:6.0mm
CONTACT:6.0mm
TOTAL:15.0mm
LEADFREE
1X02:02WAY
1X40:40WAY

DESCRIPTION: 2.54PH 180° 雙塑 H:1.50 1*XXPIN