


Recommended P.C.B Layout

MATERIAL

Insulator : 30% Glass fiber PBT
Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP
Insulation Resistance : 5000M Ω Min. at DC 500V
Contact Resistance : 20m Ω Max. at DC 100mA
Dielectric Voltage : AC 500V for one minute
Operation Temperature : -40°C to + 105°C

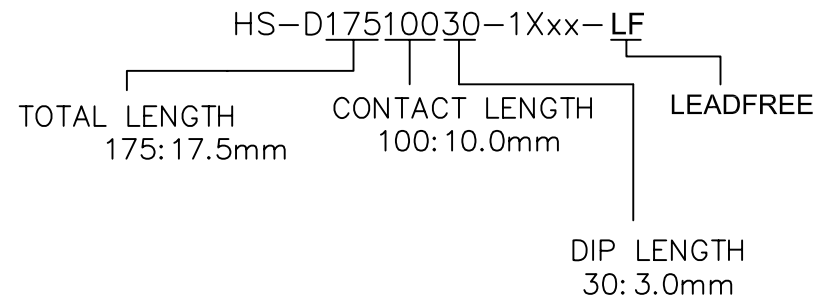

RoHS Compliant



PART NO. HS-D17510030-1Xxx

DWG NO. HS-D17510030-1Xxx

FILE NO.

UNIT / mm

SCALE 1:1

APPROVED BY CY

DRAWING BY

PROJECTION

TOLERANCES ARE

X ± 0.3
.XX ± 0.2
.XXX
AWG

DESCRIPTION: PIN HEADER 2.54*2.54mm
STRAIGHT STACK

AREA	REVISIONS	HK	DATE
------	-----------	----	------

煜倫股份有限公司