


Recommended P.C.B Layout

**MATERIAL**

Insulator : 30% Glass fiber PBT  
Contact Pin : Brass

**SPECIFICATION**

Current Rate : 3 AMP  
Insulation Resistance : 5000MΩMin. at DC 500V  
Contact Resistance : 20mΩMax. at DC 100mA  
Dielectric Voltage : AC 500V for one minute  
Operation Temperature : -40°C to + 105°C

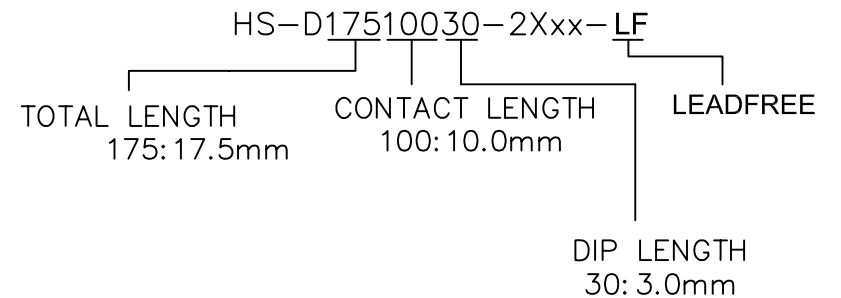

**RoHS Compliant**



PART NO. HS-D17510030-2Xxx

DWG NO. HS-D17510030-2Xxx

APPROVED BY CY

FILE NO.

DRAWING BY

TOLERANCES ARE

X ± 0.3  
.XX ± 0.2  
.XXX  
AWG

DESCRIPTION:

PIN HEADER 2.54\*2.54mm  
STRAIGHT STACK

UNIT / mm

SCALE 1:1

PROJECTION



AREA

REVISIONS

HK

DATE

煜倫股份有限公司