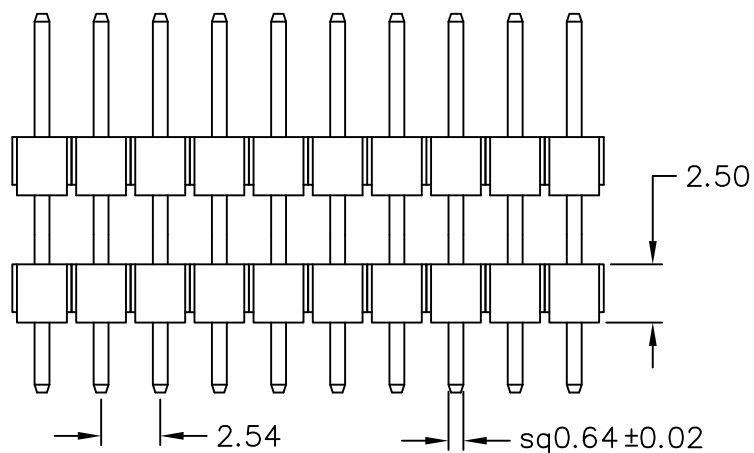
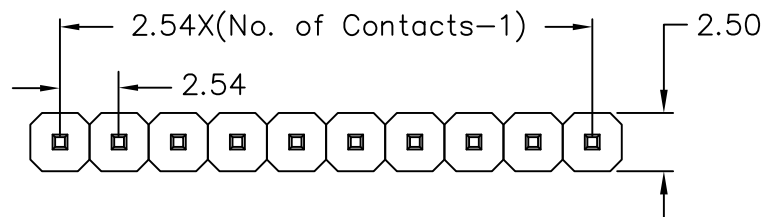


Recommended P.C.B Layout

MATERIAL

Insulator : 30% Glass fiber PBT

Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°

PPOJECTION

ORDER INFORMATION

HS-D1946030-1Xxx-LF

SERIES
DIP 180°
TOTAL 19.4mm
CONTACT 6.0mm
LEADFREE
1X02:02 WAY
1X40:40 WAY
DIP 3.0mm

DESCRIPTION: PIN HEADER 2.54*2.54mm STRAIGHT STACK