






MATERIAL

Insulator : NY66+30% Glass fiber
Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP
Insulation Resistance : 5000M Ω Min. at DC 500V
Contact Resistance : 20m Ω Max. at DC 100mA
Dielectric Voltage : AC 500V for one minute

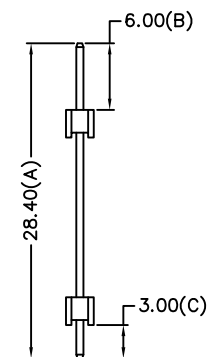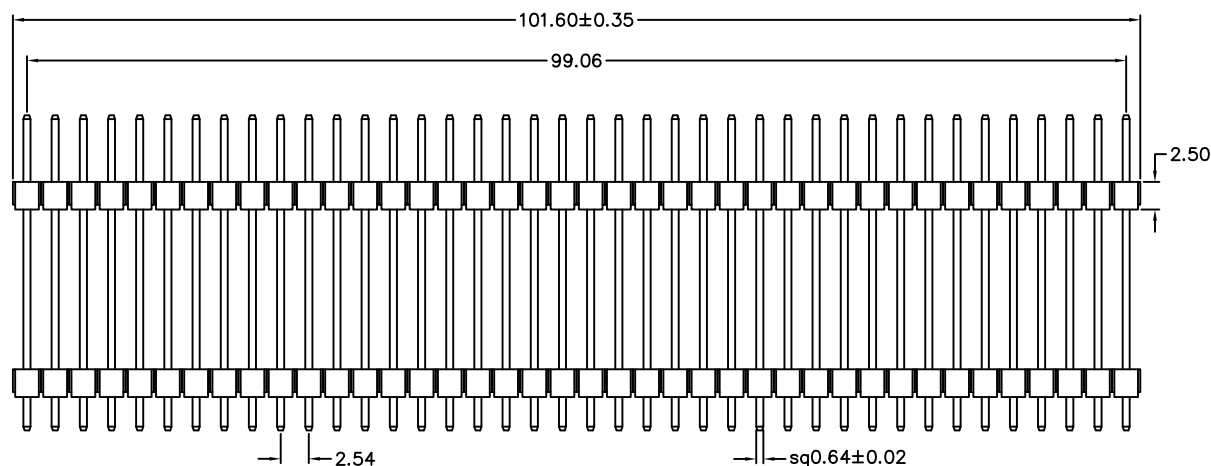

Recommended P.C.B Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, $\pm$
.X, $\pm$
.XX, $\pm$
.XXX, $\pm$
ANG, $\pm$

照片框

ORDER INFORMATION

HS-D2846030-1X40-LF
SERIES | DIP 3.0mm | CONTACT 6.0mm | TOTAL 28.40mm | DIP180° | 40 WAY | LEADFREE

DESCRIPTION:PIN HEADER 2.54*2.54mm STRAIGHT TYPE, SINGLE ROW DUAL INSULATORS