


Recommended P.C.B Layout

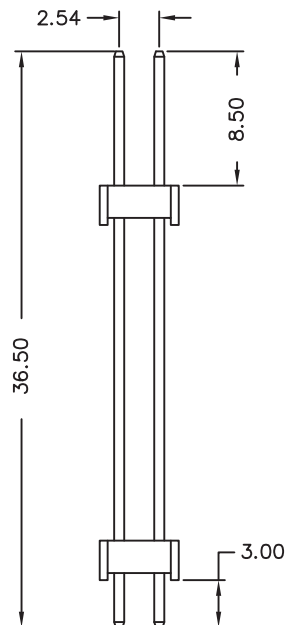

MATERIAL

Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

RoHS Compliant

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±  
.X ± 0.30  
.XX ± 0.20  
.XXX ±  
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

HS-D365085030-2X05-LF  
SERIES | | | | LEADFREE  
10 WAY  
DIP 3.0mm  
CONTACT 8.5mm  
TOTAL 36.5mm  
DIP 180°

DESCRIPTION: