


Recommended P.C.B Layout

**MATERIAL**  
 Insulator : Nylon 6T  
 Contact Pin : Brass , Gold Flash

**SPECIFICATION**  
 Current Rate : 3 AMP  
 Insulation Resistance : 5000MΩMin. at DC 500V  
 Contact Resistance : 20mΩMax. at DC 100mA  
 Dielectric Voltage : AC 500V for one minute  
 Operation Temperature : -40°C to + 105°C

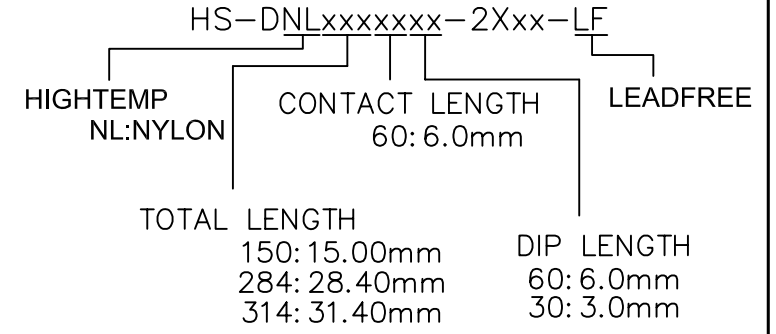

PART NO. HS-DNLxxxxxx-2Xxx

DWG NO. HS-DNLxxxxxx-2Xxx

FILE NO.

APPROVED BY CY

DRAWING BY

TOLERANCES ARE  
 .X ± 0.3  
 .XX ± 0.2  
 .XXX  
 AWG

DESCRIPTION: PIN HEADER 2.54\*2.54mm STRAIGHT STACK

煜倫股份有限公司

UNIT / mm

SCALE 1:1

PROJECTION

AREA	REVISIONS	HK	DATE
------	-----------	----	------