

**MATERIAL**

Contact Pin : Brass




**SPECIFICATION**

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

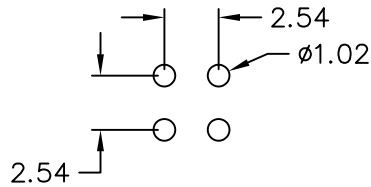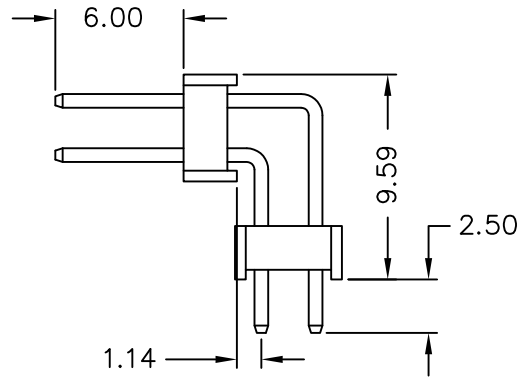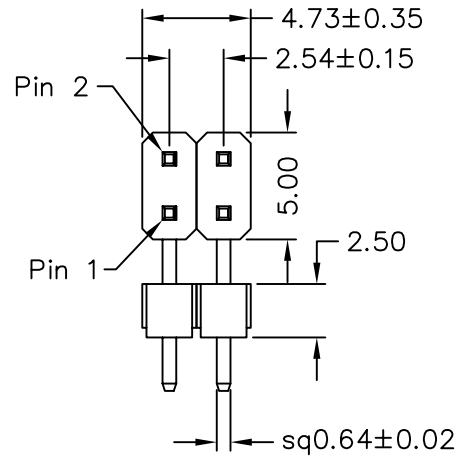

Recommended P.C.B Layout

**RoHS Compliant**

TOLERANCES ARE

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

DRAWING BY CY

X. ±

CHECKED BY GENIUS

.X ± 0.30

UNIT / mm

SCALE 1 : 1

.XX ± 0.20

DATE

.XXX ±

ANG ± 3°

**煜倫股份有限公司**

[www.morethanall.com](http://www.morethanall.com)

SIZE A4

P PROJECTION

照片框

**ORDER INFORMATION**

HS-RH36602596-2X02-LF  
SERIES | HIGH TYPE | CONTACT 6.0mm | R/A 3.64mm | DIP 2.5mm | DIP 90° | 04 WAY | LEADFREE

DESCRIPTION: PIN HEADER 2.54\*2.54mm  
RIGHT ANGLE TYPE, DUAL ROWS DUAL INSULATORS