


P.C.B. LAYOUT

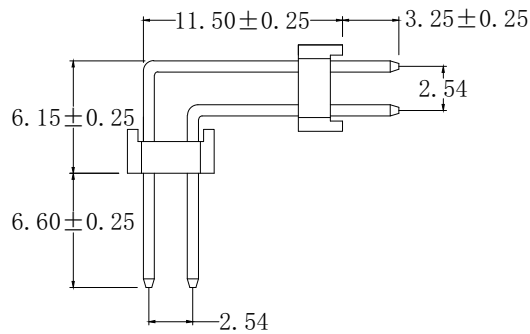

**MATERIAL**

HOUSING :PBT, UL-94V0

CONTACT :COPPER ALLOYS

PLATED :GOLD FLASH

COLOR :BLACK

**SPECIFICATION**

CURRENT : 3A

OPERATING TEMPERAURE : -55° C TO +105° C

CONTACT RESISTANCE : 20 MILLIOHMS MAX

INSULATION RESISTANCE: 1000 MEGAOHMS MIN

WITHSTAND VOLTAGE : 1000 V AC/minute

CONTACTS			
	2×11	2×21	2×31
2×02	2×12	2×22	2×32
2×03	2×13	2×23	2×33
2×04	2×14	2×24	2×34
2×05	2×15	2×25	2×35
2×06	2×16	2×26	2×36
2×07	2×17	2×27	2×37
2×08	2×18	2×28	2×38
2×09	2×19	2×29	2×39
2×10	2×20	2×30	2×40

**RoHS Compliant**

TOLERANCES ARE



**煜倫股份有限公司**

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1

DATE

SIZE A4

X ±  
.X ± 0.38  
.XX ± 0.25  
.XXX ±  
ANG ± 5°

PPOJECTION

照片框

**ORDER INFORMATION**

HS-RHA1366632-2Xxx-LF  
 SERIES | | | | LEADFREE  
 | | | | 2X02:04 WAY  
 | | | | 2X40:80 WAY  
 DIP 90° | | | | DIP 3.25mm  
 HIGH TYPE | | | | CONTACT 6.60mm  
 11.5mm R/A 3.6mm

DESCRIPTION: 2.54PH 雙邊塑 90° H:2.54 2\*XXPIN