
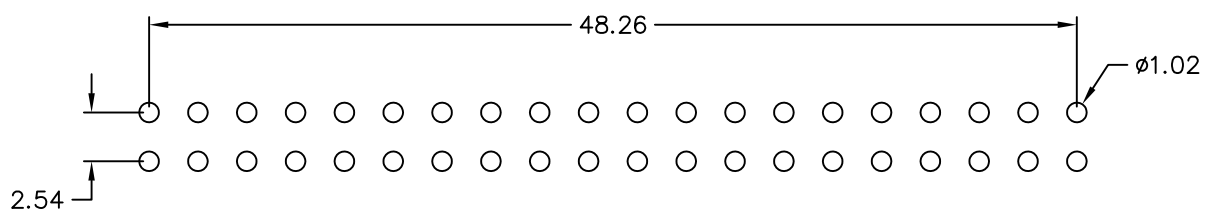
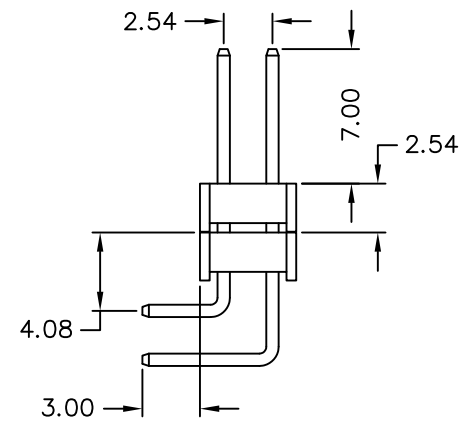


MATERIAL

Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP
 Insulation Resistance : 5000MΩMin. at DC 500V
 Contact Resistance : 20mΩMax. at DC 100mA
 Dielectric Voltage : AC 500V for one minute

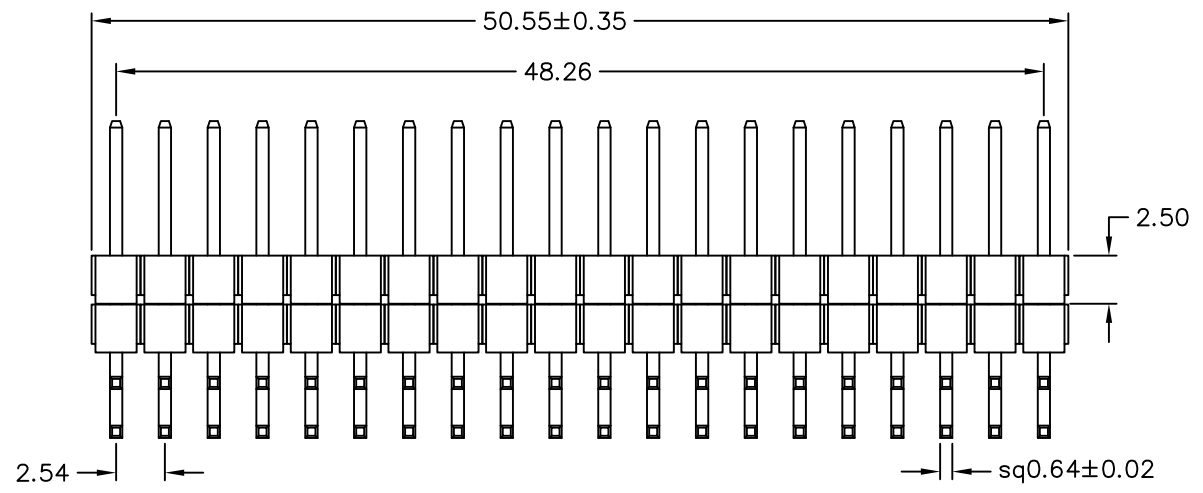

Recommended P.C.B Layout

RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4 PPROJECTION

X. ±
 .X ± 0.30
 .XX ± 0.20
 .XXX ±
 ANG ± 3°



ORDER INFORMATION

HS-RL50157030-2X20-LF
 SERIES | | | | | LEADFREE
 DIP 90° | | | | | 40 WAY
 LOW TYPE | | | | | CONTACT 7.0mm
 R/A 1.54mm
 BASE 5.08mm

DESCRIPTION: PIN HEADER 2.54*2.54mm
 RIGHT ANGLE TYPE, DUAL ROWS DUAL INSULATORS