
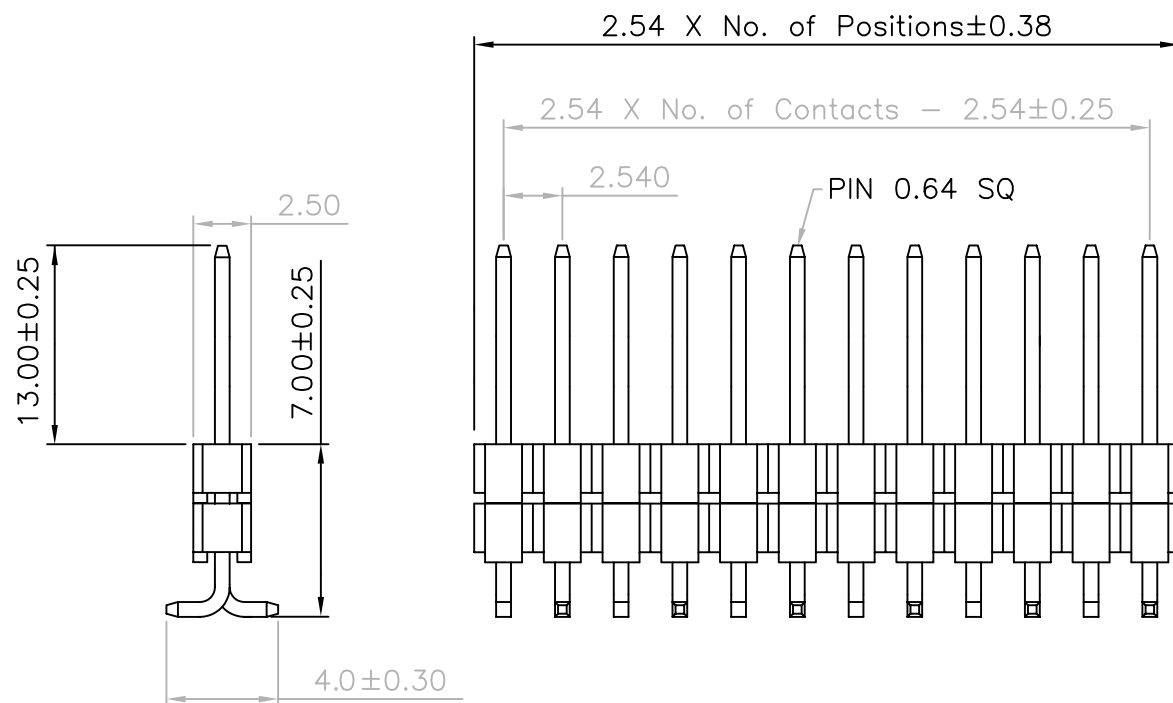


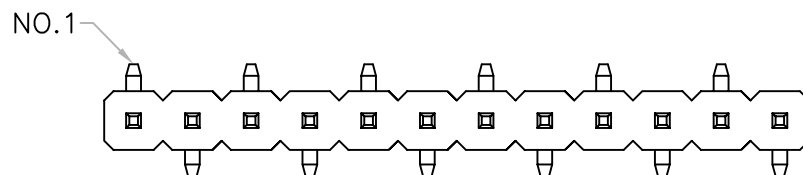


Specifications

Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Copper Alloy
 Insulation Material: Polyester, UL 94V-0
 NYLON 6T

Recommended P.C.Board Layout

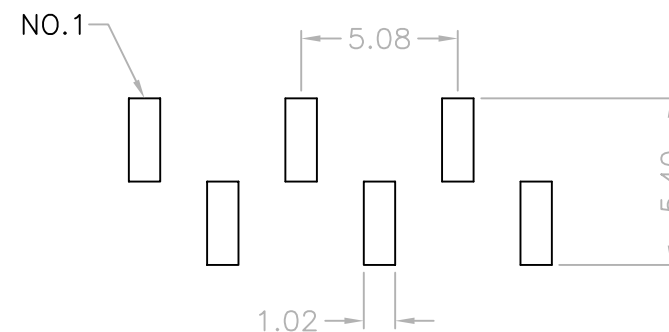

RoHS Compliant

TOLERANCES ARE

MORETHANALL
 PCB CONNECTORS
 Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X, ±
 .X ± 0.38
 .XX ± 0.25
 .XXX ± 0.13
 ANG ±

照片框

ORDER INFORMATION

HS-V070X130-1XxxR-LF
 SERIES | 180°SMT HIGH 7.0mm | CONTACT 13.0mm | NON POST | LEADFREE R TYPE FOOT | 1X02:02 WAY | 1X40:40 WAY

DESCRIPTION: 2.54 PIN HEADER SINGLE ROW SMT TYPE BASE 2.54H