

2.54MM PIN HEADER SURFACE MOUNT STACK TYPE

MATERIAL

Insulator : 30% Glass fiber PBT

Contact Pin : Brass





SPECIFICATION

Current Rate : 1 AMP

Insulation Resistance : 5000M Ω Min. at DC 500V

Contact Resistance : 20m Ω Max. at DC 100mA

Operation Temperature : -55°C to +105°C

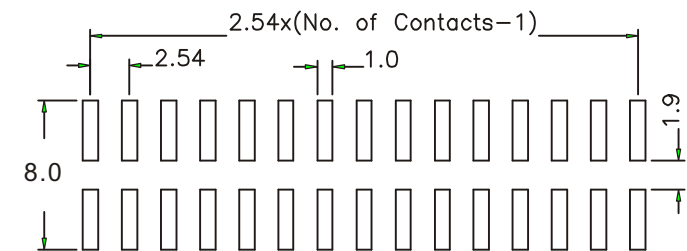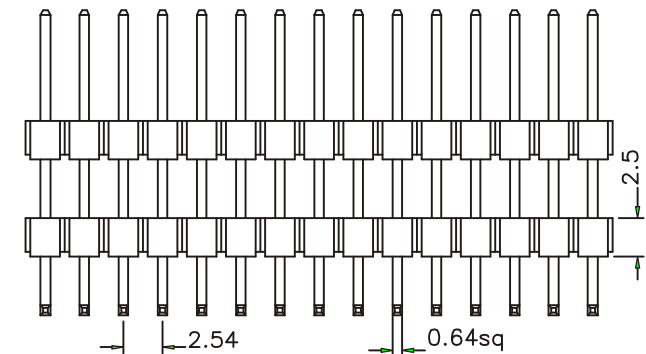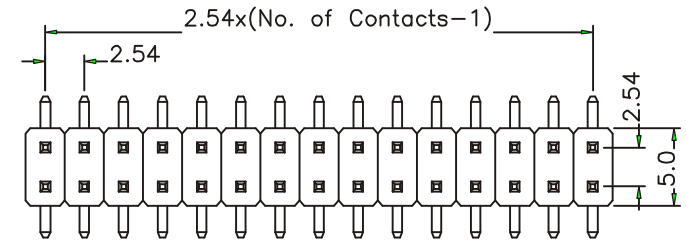

Recommended P.C.B. Layout

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. $\pm$

.X $\pm$

.XX $\pm$

.XXX $\pm$

ANG $\pm$

照片框

ORDER INFORMATION

HS-V200X70-2Xxx-LF
SERIES | 180°SMT | CONTACT | LEADFREE
2X02:04 WAY
2X40:80 WAY
NON POST
HIGH 20.0mm
CONTACT 7.0mm

DESCRIPTION: 2.54MM PIN HEADER SMT STACK TYPE