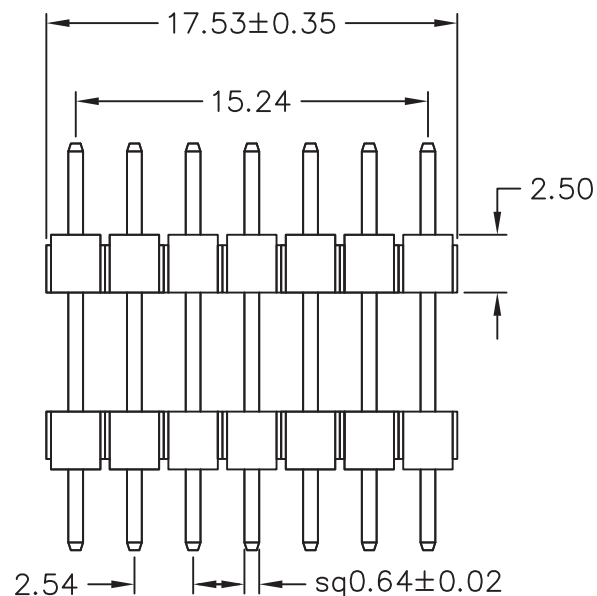
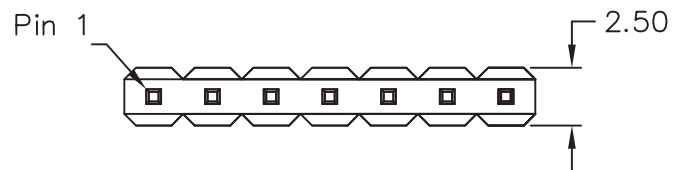


Recommended P.C.B Layout

MATERIAL

Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

HSB-D1763535-1X07-LF
SERIES
DIP 3.5mm
CONTACT 3.5mm
TOTAL 17.6mm
DIP180°
LEADFREE
07 WAY

DESCRIPTION: PIN HEADER 2.54*2.54mm STRAIGHT TYPE, SINGLE ROW OPPOSITE INSULATORS