


Recommended P.C.B Layout

MATERIAL

Insulator : 30% Glass fiber PBT
Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP
Insulation Resistance : 5000M Ω Min. at DC 500V
Contact Resistance : 20m Ω Max. at DC 100mA
Dielectric Voltage : AC 500V for one minute
Operation Temperature : -40°C to + 105°C

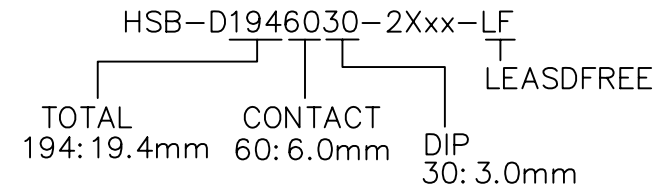

RoHS Compliant



PART NO. HSB-D1946030-2Xxx		APPROVED BY CY		TOLERANCES ARE .X \pm 0.3 .XX \pm 0.2 .XXX AWG		DESCRIPTION: PIN HEADER 2.54*2.54mm STRAIGHT STACK	
DWG NO. HSB-D1946030-2Xxx		DRAWING BY					
FILE NO.		PROJECTION		AREA	REVISIONS	HK	DATE
UNIT / mm	SCALE 1:1						

煜倫股份有限公司