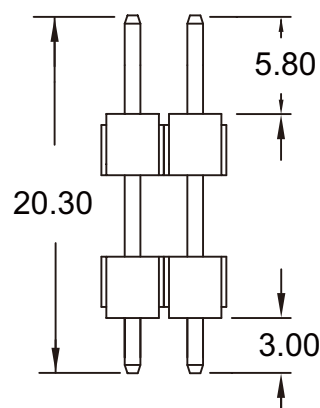
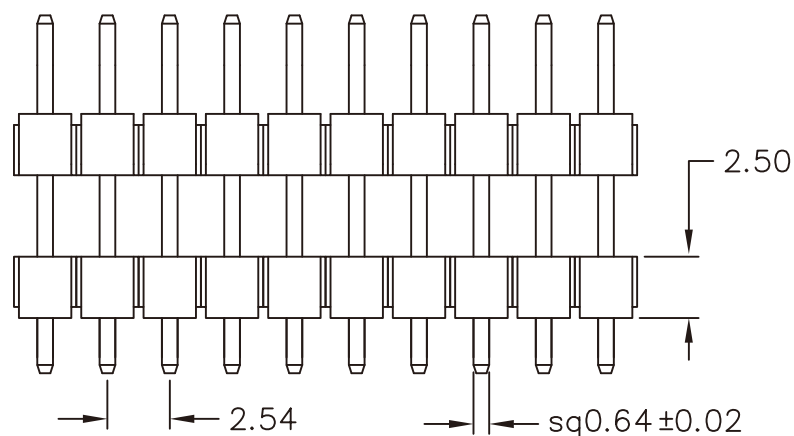
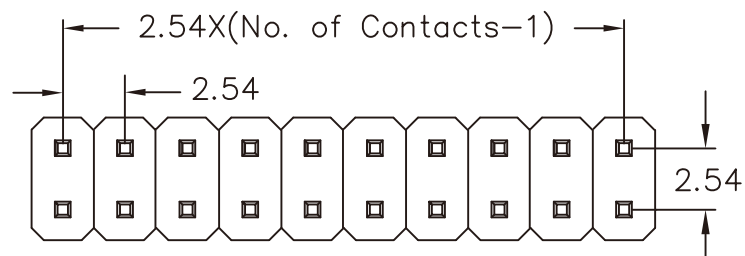


Recommended P.C.B Layout

## MATERIAL

Insulator : 30% Glass fiber PBT

Contact Pin : Brass, Gold Flash

## SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

**MORETHANALL**  
PCB CONNECTORS  
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

**RoHS Compliant**

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±  
.X ± 0.30  
.XX ± 0.20  
.XXX ±  
ANG ±

PJECTION

照片框

## ORDER INFORMATION

HSB-D203058030-2Xxx-LF

SERIES  
DIP180°  
CONTACT 5.8mm  
TOTAL 20.3mm  
LEADFREE  
2X02:04WAY  
2X50:100WAY  
DIP 3.0mm

DESCRIPTION: PIN HEADER 2.54\*2.54mm STRAIGHT STACK