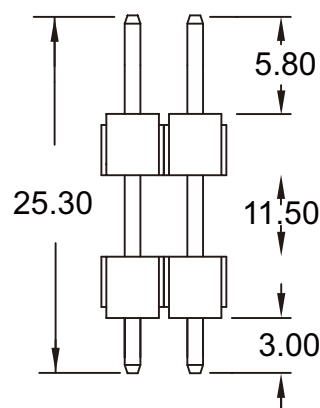
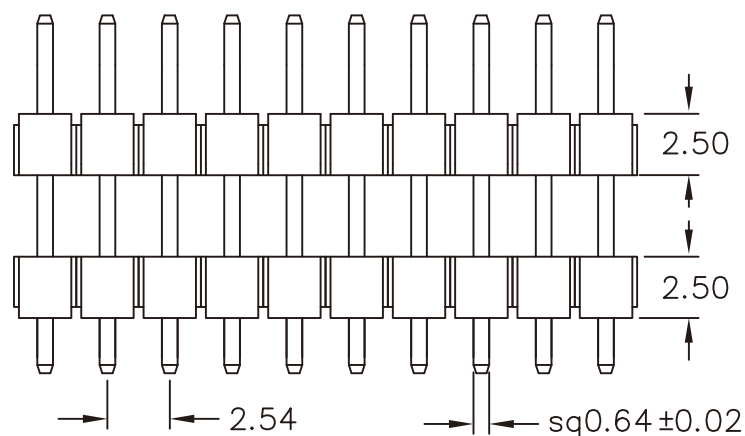
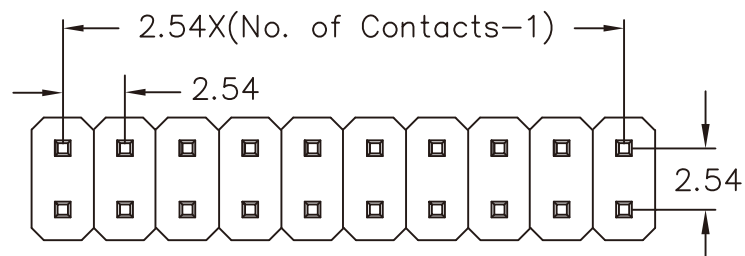


Recommended P.C.B Layout

MATERIAL

Insulator : 30% Glass fiber PBT

Contact Pin : Brass, Gold Flash

SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ± 0.30
.XX ± 0.20
.XXX ±
ANG ±

PJECTION

照片框

ORDER INFORMATION

HSB-D253058030-2Xxx-LF

SERIES
DIP180°
TOTAL 25.3mm
CONTACT 5.8mm
DIP 3.0mm
2X50:100WAY
2X02:04WAY
LEADFREE

DESCRIPTION: PIN HEADER 2.54*2.54mm STRAIGHT STACK