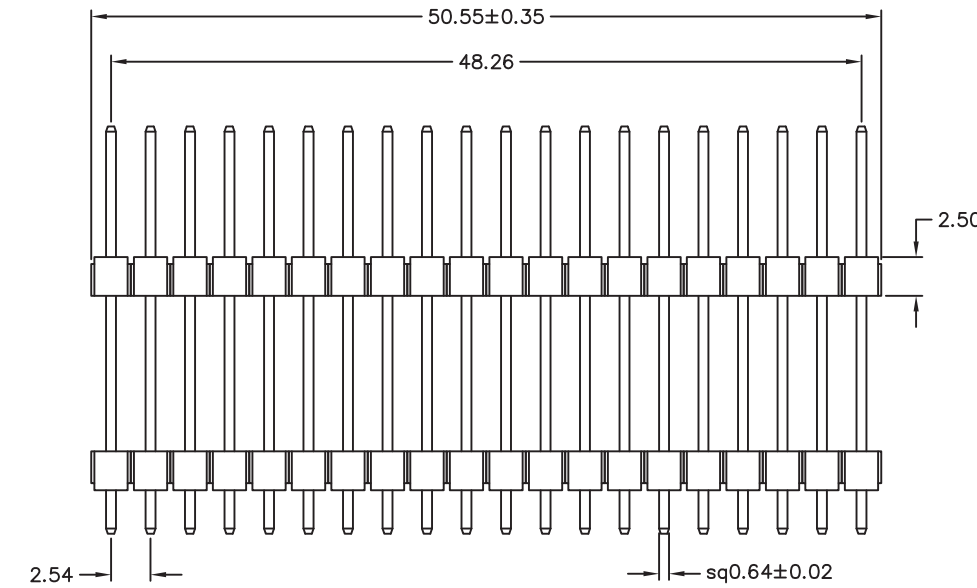
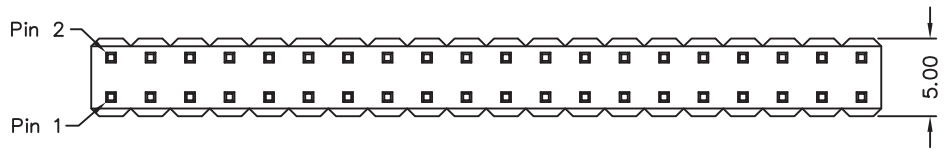


Recommended P.C.B Layout

MATERIAL
Contact Pin : Brass

SPECIFICATION
Current Rate : 3 AMP
Insulation Resistance : 5000MΩMin. at DC 500V
Contact Resistance : 20mΩMax. at DC 100mA
Dielectric Voltage : AC 500V for one minute

RoHS Compliant

TOLERANCES ARE

照片框

ORDER INFORMATION

HSB-D2628428-2X20-LF
SERIES | | | | LEADFREE
| | | | 40 WAY
| | | | DIP 2.8mm
| | | | CONTACT 8.4mm
| | | | TOTAL 26.2mm
| | | | DIP180°

DESCRIPTION:PIN HEADER 2.54*2.54mm STRAIGHT TYPE, DUAL ROWS OPPOSITE INSULATORS

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES
煜倫股份有限公司
www.morethanall.com

DRAWING BY CY		X. ± .X ± 0.30 .XX ± 0.20 .XXX ± ANG ± 3°
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PPOJECTION	