
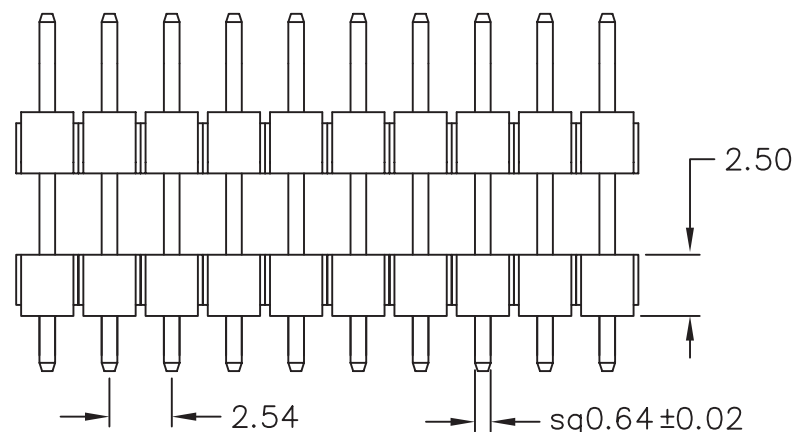


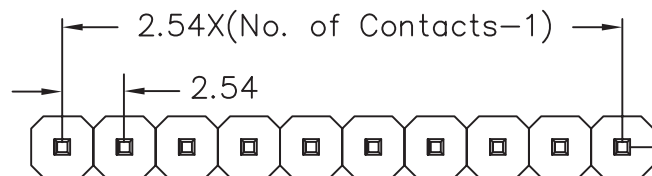

Recommended P.C.B Layout

MATERIAL

Insulator : 30% Glass fiber PBT

Contact Pin : Brass, Gold Flash

SPECIFICATION


Current Rate : 3 AMP

Insulation Resistance : 5000MΩMin. at DC 500V

Contact Resistance : 20mΩMax. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

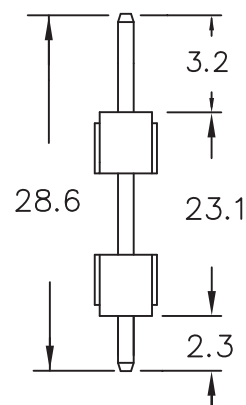

照片框

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X, ±

.XX, ±

.XXX, ±

ANG ±

PPOJECTION

ORDER INFORMATION

HSB-D2863223-2Xxx-LF
SERIES
DIP180°
LEADFREE
2X02:04WAY
2X40:80WAY
DIP 2.3mm
CONTACT 3.2mm
TOTAL 28.6mm

DESCRIPTION: PIN HEADER 2.54*2.54mm STRAIGHT STACK