




MATERIAL
Contact Pin : Brass

SPECIFICATION
Current Rate : 3 AMP
Insulation Resistance : 5000MΩMin. at DC 500V
Contact Resistance : 20mΩMax. at DC 100mA
Dielectric Voltage : AC 500V for one minute

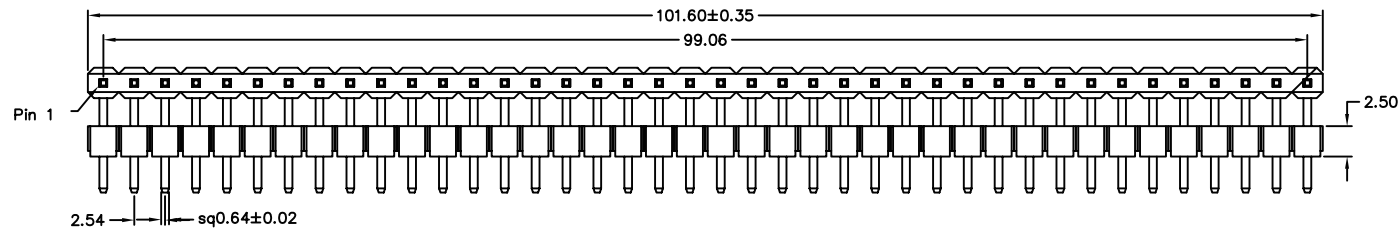

Recommended P.C.B Layout

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

TOLERANCES ARE

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION

照片框

ORDER INFORMATION

HSB-R60603060-1X40-LF
SERIES | HIGH 6.0mm | 40 WAY | LEADFREE
90°SMT | DIP 3.0mm | CONTACT 6.0mm | BASE 6.0mm

DESCRIPTION: PIN HEADER 2.54*2.54mm RIGHT ANGLE TYPE, DUAL ROWS