

SIMM Socket, Pitch 1.27mm,
Standard Key, Plastic Post, Type 17.
Physical:

Housing: LCP Or NY, UL 94V-0

Contact: Copper Alloy

Specifications:

Current Rating: 1A.

Insulation Resistance: 1000M ohm min

Contact Resistance: 30m ohm max

Dielectric Withstanding Voltage:




AC 500V For 1 Minute

Temperature Rating: -55°C To +105°C

Wave Soldering temperature:

Lead Part: 245±5°C, 5sec

RoHS Part: 260±5°C, 5sec

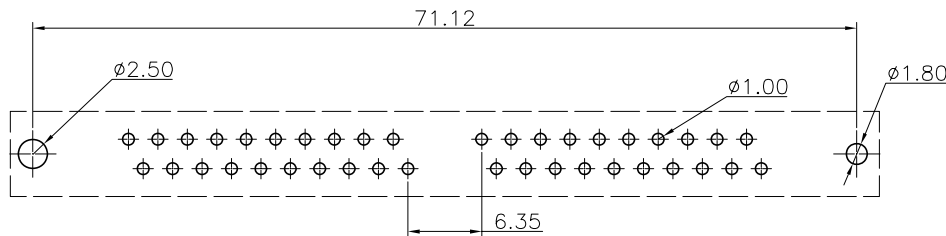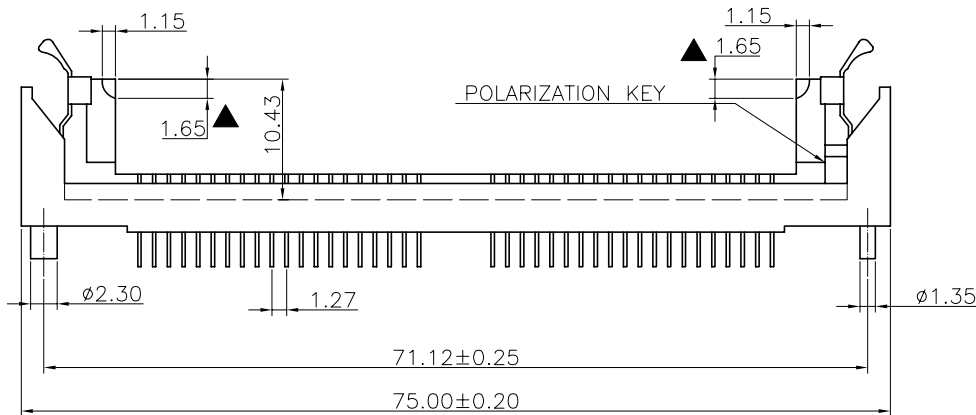

TOP VIEW

PCB LAYOUT RECOMMENDED

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4

X, ±
.X ± 0.25
.XX ± 0.15
.XXX ±
ANG ± 3°

PPOJECTION

照片框

ORDER INFORMATION

HSM-D-1X40-LF
SERIES | LEADFREE
40 WAY
DIP 180°

DESCRIPTION: