
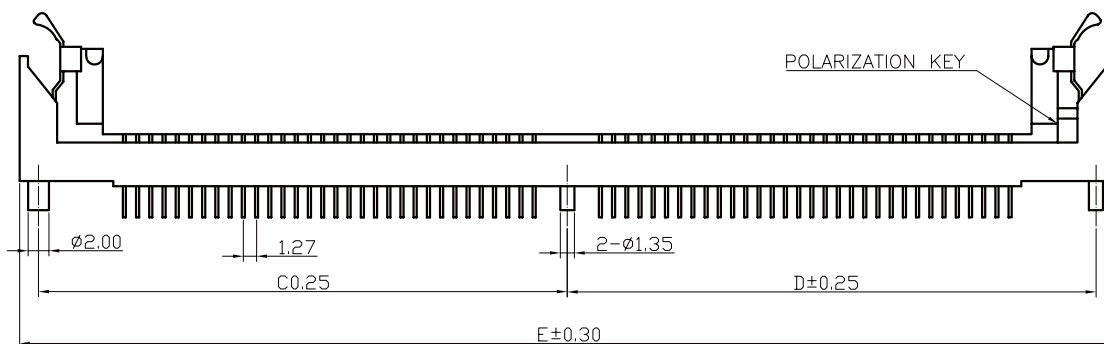
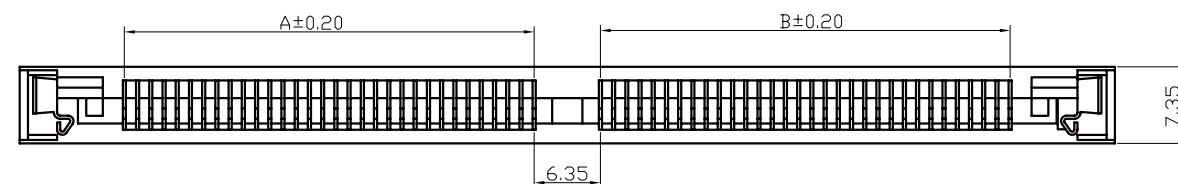


TOP VIEW
PCB LAYOUT RECOMMENDED



SIMM Socket, Pitch 1.27mm
Plastic Post, Type 5
Physical:

Housing: LCP Or NY, UL 94V-0

Contact: Copper Alloy

Specifications:

Current Rating: 1A.

Insulation Resistance: 1000M ohm min

Contact Resistance: 30m ohm max

Dielectric Withstanding Voltage:

AC 500V For 1 Minute

Temperature Rating: -55°C To +105°C

Wave Soldering temperature:

Lead Part: 245±5°C, 5sec

RoHS Part: 260±5°C, 5sec

PINS	A	B	C	D	E
64	39.37	39.37	50.80	50.80	105.23
68	41.90	41.90	53.34	53.34	110.31
72	44.45	44.45	55.78	55.78	115.45
80	49.53	49.53	60.90	60.90	125.75

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

RoHS Compliant

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1:1


DATE

SIZE A4

TOLERANCES ARE

X. ±
.X ±
.XX ±
.XXX ±
ANG ±

PPOJECTION



ORDER INFORMATION

HSM-D-1Xxx-LF
SERIES LEADFREE
1X64:64 WAY
1X80:80 WAY
DIP 180°

DESCRIPTION: