


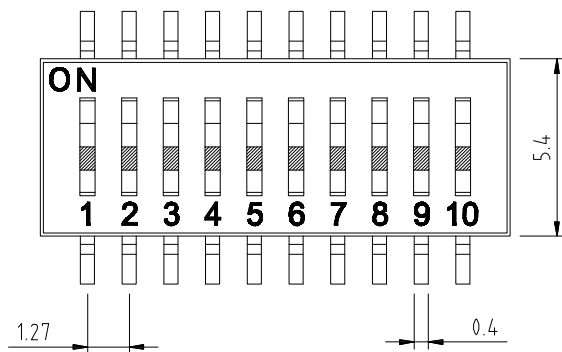
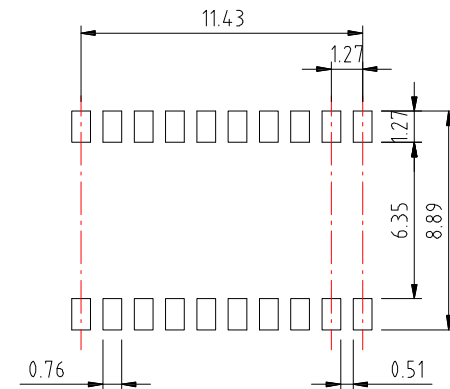



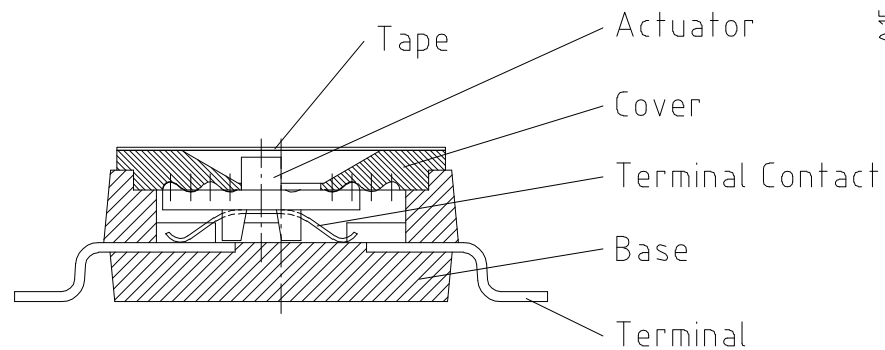

Poles(N)	A (mm)
01	2.87
02	4.12
03	5.41
04	6.66
05	7.93
06	9.20
08	11.74
10	14.28

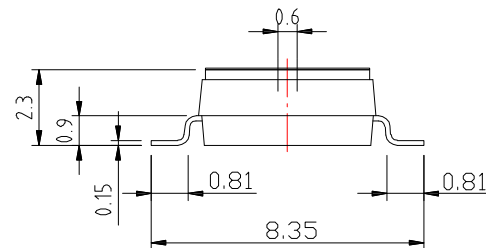

P.C.B LAYOUT MOUNTING PATTERN

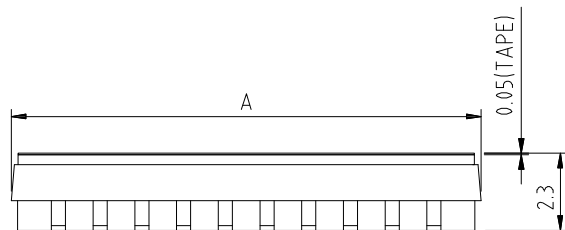

SCHEMATIC

Part Name	Material	Finished
Base	PPS	Black
Cover	PPS	Black
Actuator	PA9T	White
Movable	Beryllium	Gold
Terminal Contact	Brass	Gold
Terminal	Brass	Gold
Tape	PI	Amber

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

Up to 5 ±0.2
Above 5 ~ 15 ±0.3
Above 15 ~ 30 ±0.4
Above 30 ~ 50 ±0.5
Angle ±0.3°

照片框

ORDER INFORMATION

HSW-SV23W8C-xx-LF
SERIES LEADFREE
01~10 WAY
MYLAR
WIDTH 8.3mm
HIGH 2.3mm
180°SMT
FEMALE

DESCRIPTION: DIP SWITCH 1.27MM TUBE