
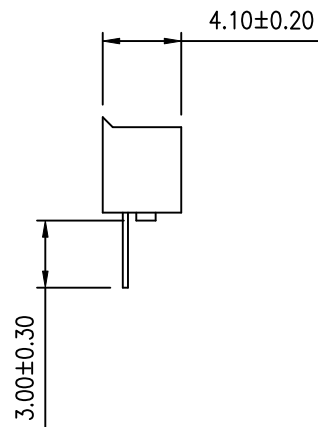
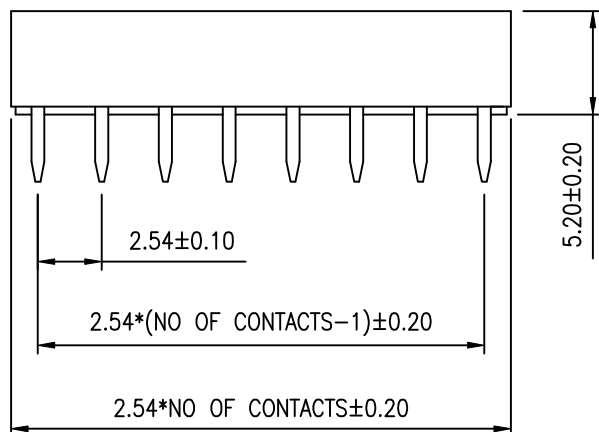





SPECIFICATION

- * Current Rating:
1 A
- * Withstanding Voltage:
1000 VAC (1 min.)
- * Insulation Resistance:
1000 Megohms min.
- * Contact Resistance:
20 Milliohms max.
- * Operating Temperature:
-40°C to +85°C

MATERIAL

- * Contact: Phosphor Bronze
- * Insulator: PBT & 30% G.F.
- * Plating: Tin

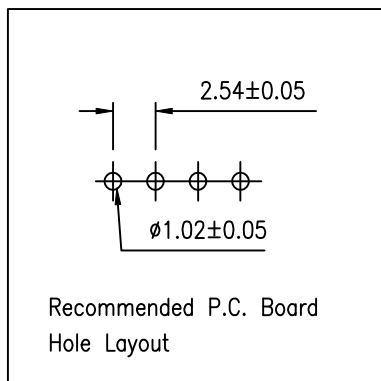

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

PPOJECTION

X. ± 0.30
.X ± 0.30
.XX ± 0.20
.XXX ± 0.10
ANG ± 1°

照片框

ORDER INFORMATION

IC-D-1Xxx-LF
SERIES | LEADFREE
1X03:03WAY
1X20:20WAY
DIP 180°

DESCRIPTION: 2.54mm (.100") Center SIP SOCKET