
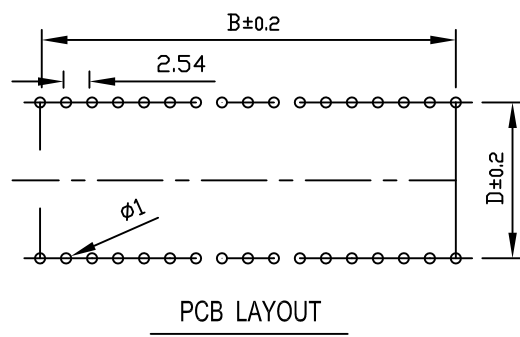
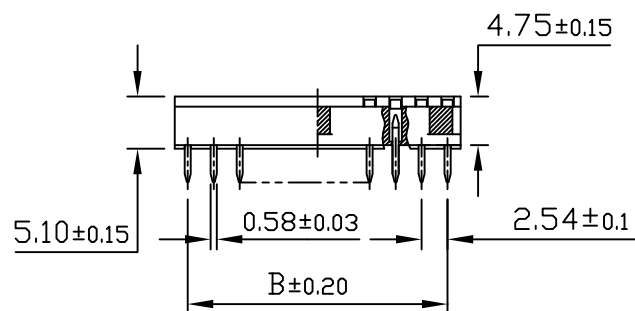


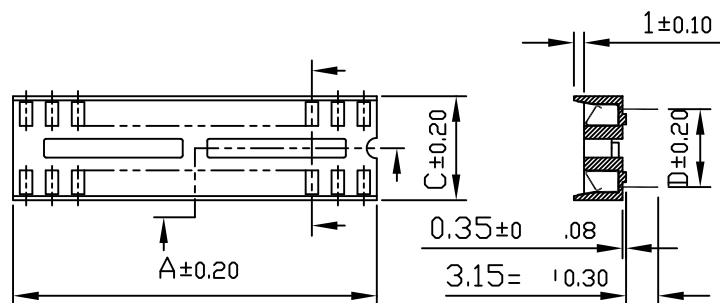

MATERIAL:

Contact:

phosphor Bronze thickness 0.15mm

Contact Plating: Sn-Cu plated 120u"~200u"

Insulator: Nylon 9T , UL 94V-0

SPECIFICATIONS:

Current Rating : 1A

Dielectric withstanding Voltage : 1000v RMS/minute

Insulator resistance : 5000 Megohms min.

Contact resistance : 20 milliohms initial

30 milliohms after test.

Operating temperatures : -55°C to 85°C

Insertion force : 340g(12 oz) max.per contact.

Withdrawal force : 80g(2.82 oz) min.per contact

PART NO	CKT	A±0.20	B±0.20	C±0.20	D±0.20
IC-D03N9T-06	6	7.62	5.08	10.16	7.62
IC-D03N9T-08	8	10.16	7.62		
IC-D03N9T-14	14	17.78	15.24		
IC-D03N9T-16	16	20.32	17.78		
IC-D03N9T-18	18	22.86	20.32		
IC-D03N9T-20	20	25.40	22.86		
IC-D03N9T-24	24	30.48	27.94		
IC-D03N9T-28	28	35.56	33.02		

RoHS Compliant

TOLERANCES ARE

MORETHANALL
PCB CONNECTORS
Cable ASSEMBLIES

煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1

DATE

SIZE A4

X, ±

.X ±

.XX ±

.XXX ±

ANG ±

PPOJECTION

照片框

ORDER INFORMATION

IC-D03N9T-xx-LF
SERIES
LEADFREE
06~28WAY
NYLON 9T
SPACING 7.62mm
DIP 180°

DESCRIPTION: